



Home Connect

System requirements

- [Control4 OS 3.3+](#)

Index

- [Overview](#)
- [Features](#)
- [Prerequisites](#)
- [Installer Setup](#)
 - [Server Setup](#)
 - [Homebridge](#)
 - [HOOPS 4](#)
 - [HOOPS 5](#)
 - [DriverCentral Cloud Setup](#)
 - [Driver Installation](#)
 - [Driver Setup](#)
 - [Driver Tabs](#)
 - [Driver Properties](#)
 - [Cloud Settings](#)
 - [Driver Settings](#)
 - [Server Settings](#)
 - [Accessories](#)
 - [Virtual Accessories](#)
 - [Driver Actions](#)
 - [Driver Events](#)
- [Customer Setup](#)
- [Developer Information](#)
- [Support](#)
- [Changelog](#)

Overview

The Home Connect driver integrates Control4 devices with Apple HomeKit using a [Homebridge](#) or [HOOBS 4/HOOBS 5](#) server. This will enable customers to control supported Control4 devices through the [Apple Home](#) app and [Siri Voice Assistant](#) where available.

A Homebridge or HOOBS server installation is required to act as the proxy between Control4 and Apple Home.

- Homebridge is a software-only offering and can be installed and run on many platforms and devices. See [their installation guide](#) for more information.
- HOOBS offers simple [Plug and Play Hubs](#) available for purchase on their website. Alternatively, you can manually install their software on a variety of devices. See [their installation guide](#) for more information.

Features

- Easy setup with a *single* driver configuration that can support all your project's devices in one place
- Local network communication requiring no cloud services
- Fast and reliable two-way feedback between Control4 and Apple Home
- Integrate Apple Home's leaving and arriving home geofencing automations to control devices
- Automated [Homebridge/HOOBS 4/HOOBS 5](#) configuration and monitoring
- Project synchronization that requires no reconfiguration when devices are added, removed, renamed, or moved
- Support for the following Control4 devices:
 - Room Watch & Listen activities, including remote and volume control
 - Cameras*
 - Light Switches, Dimmers, and Outlets
 - Color-capable lighting
 - Advanced lighting scenes
 - Relays
 - Fireplaces
 - Fan speed controllers
 - Blinds
 - Thermostats

- Locks
- Motion sensors
- Occupancy sensors
- Contact sensors
- Leak/Water sensors
- Smoke sensors
- Carbon monoxide sensors
- Temperature sensors
- Humidity sensors
- Doorbells
- Garage doors
- Doors
- Gates
- Windows
- Security systems
- Macro triggering
- Programmable virtual switches and buttons for use in Control4 programming and Apple Home automations

* Camera support is dependent on Homebridge/HOOBS server support. See the [Cameras Supported](#) property for more information.

Prerequisites

- A running [Homebridge](#) or [HOOBS 4/HOOBS 5](#) server installation accessible on the local network and valid login credentials with administrator privileges ([see below server setup](#)).

Installer Setup

⚠ Only a **single** driver instance is required per Homebridge/HOOBS server. Multiple instance of this driver connected to the same server will have unexpected behavior. However, you can have multiple instances of this driver connected to **different** Homebridge/HOOBS servers.


Server Setup

This driver supports either [Homebridge](#) or [HOOBS](#) servers to act as the proxy between the Apple Home and Control4. You must choose one before continuing setup, and there is no "correct" choice. It comes down to personal preference and which one is easier for you to deploy.

Homebridge

If you are not using Homebridge as your HomeKit proxy you can continue to [HOOBS 4](#) or [HOOBS 5](#) setup below.


1. If you do not already have a Homebridge server, refer to [their installation guide](#) and return here once your server is powered on and running.
2. Navigate to `http://<ip address of your server>:8581` in a web browser. If this is the first time loading Homebridge you should see the following screen and can click "Get Started", otherwise skip to Step 5 after logging in:

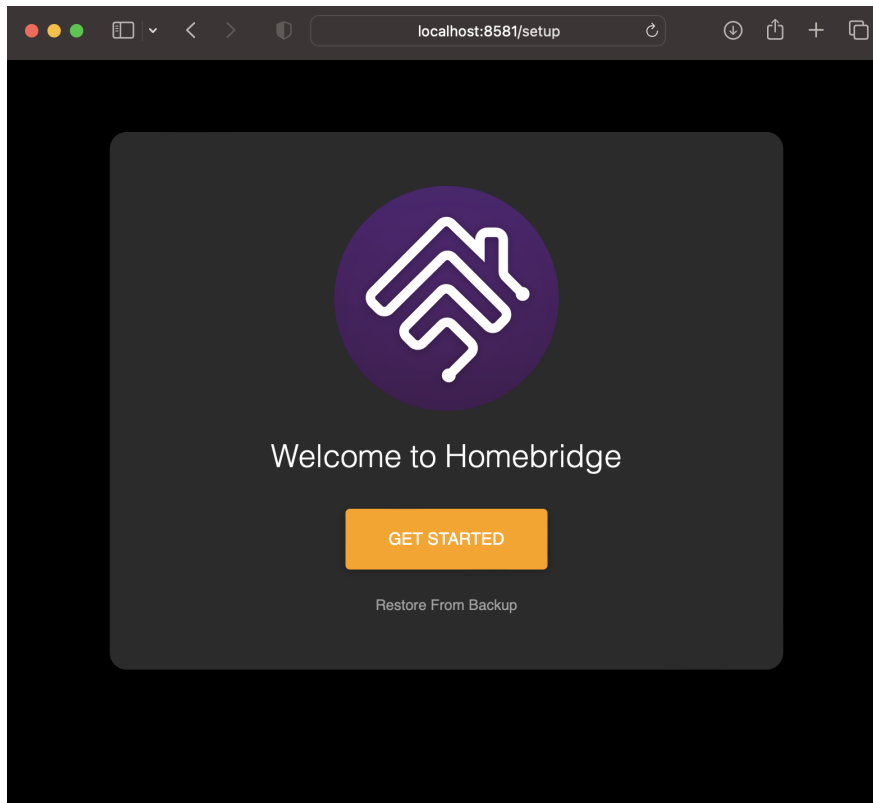


3. Fill in information for an `admin` account, then click "Create Account":

This will be your main user account and not used by the driver.


4. Click "Open Dashboard":

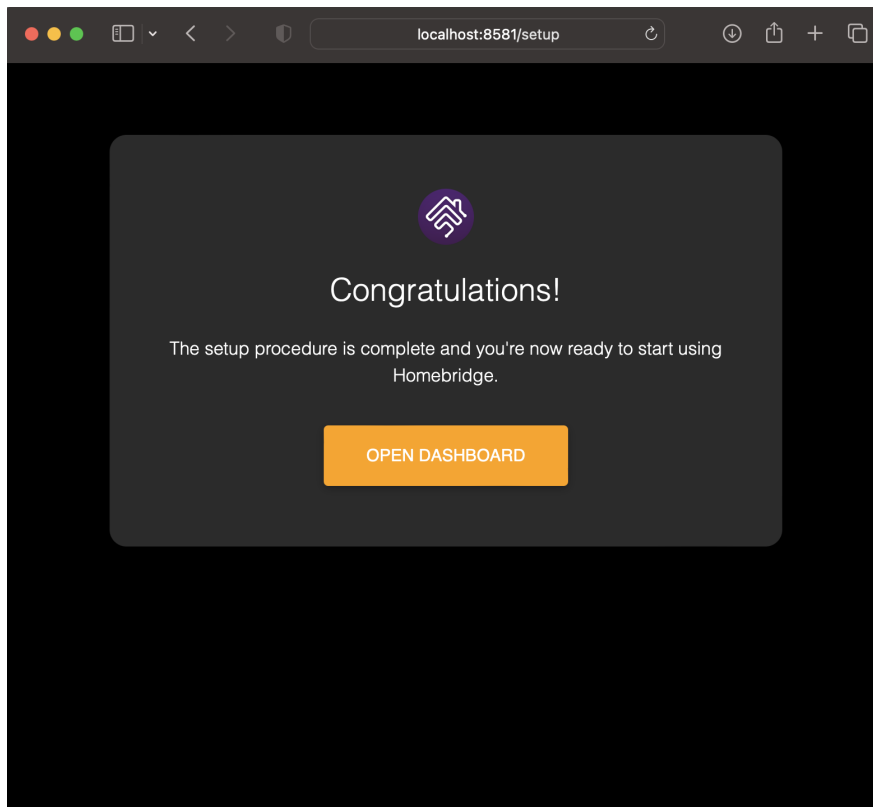

5. Now we are going to create an account to be used by this driver. Click the settings icon in the top right then click "User Accounts":

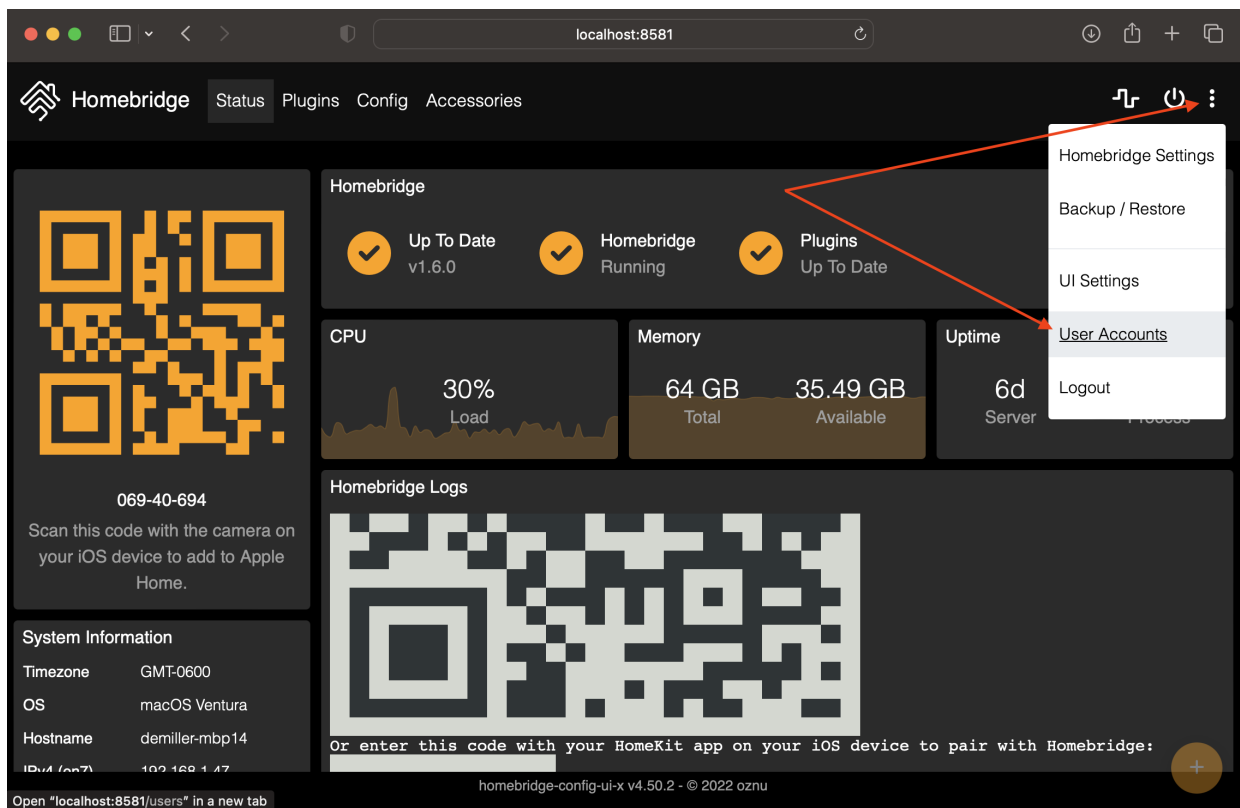


6. Click "Add User":

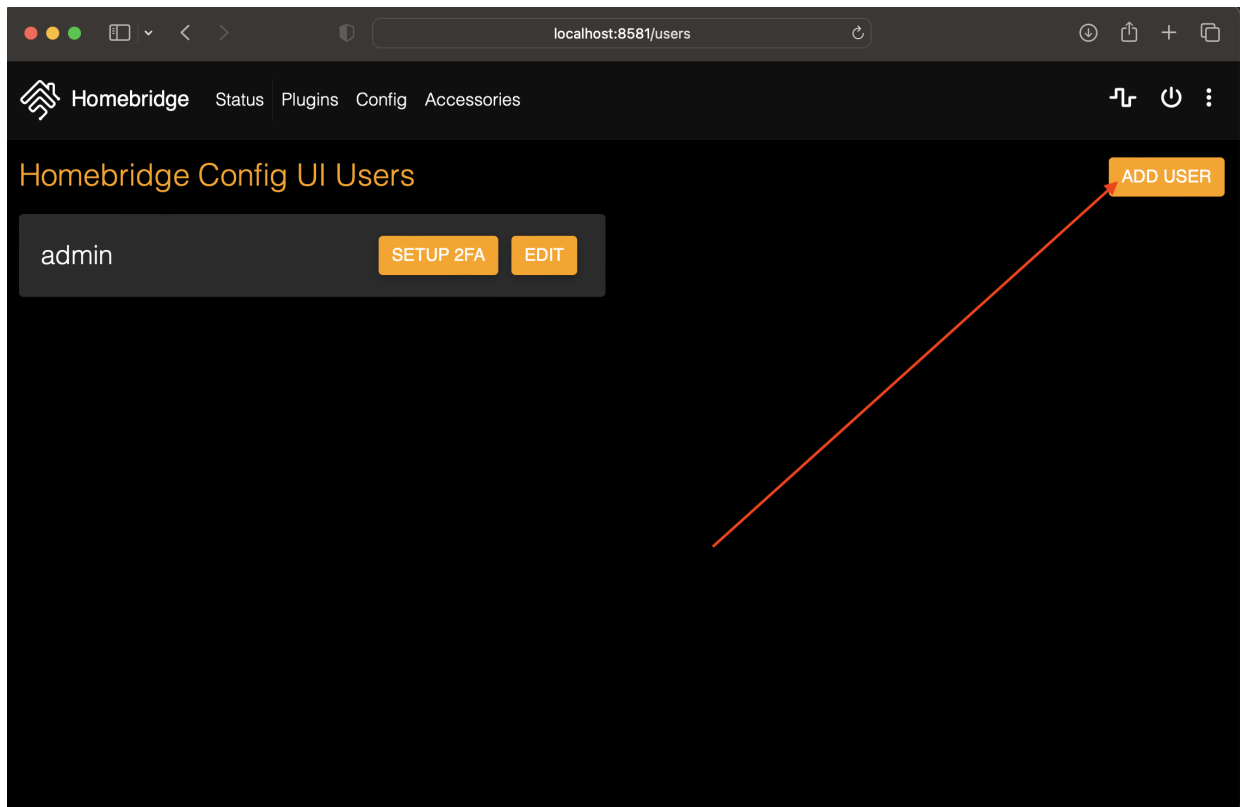


7. Fill in information for a `control4` user, ensuring "Admin User?" is selected, then click "Add New User":

Remember this password as it will be used later to configure the driver.

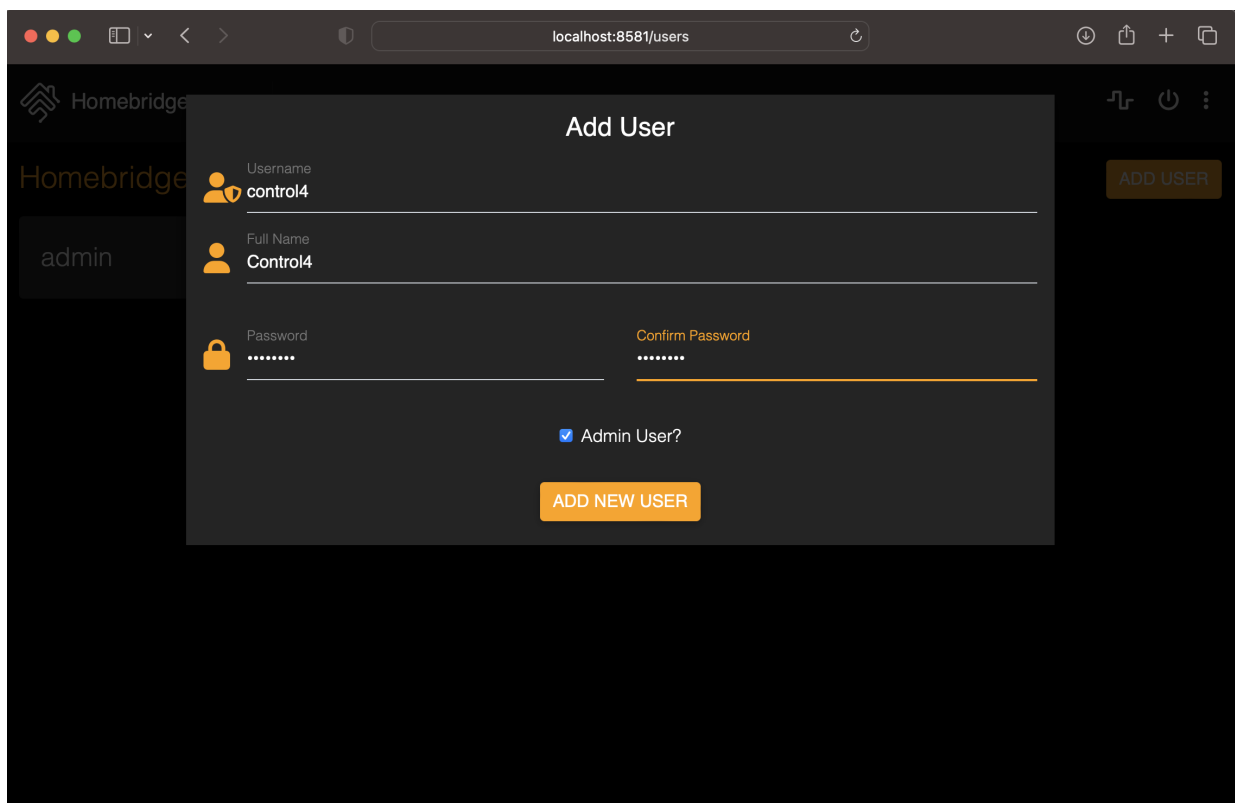


8. You should now see the two users you just created. You can close the Homebridge webpage and return to the Composer UI.

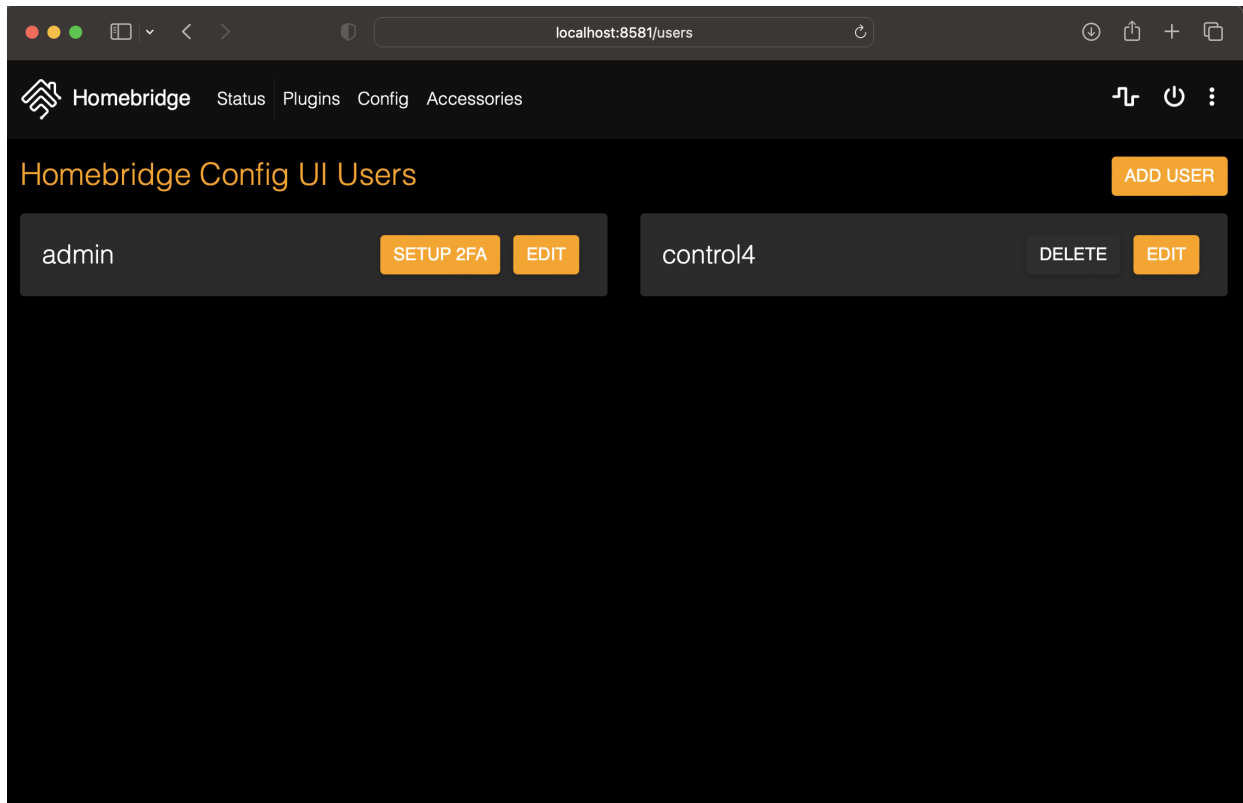

HOOBS 4

If you are not using HOOBS 4 as your HomeKit proxy you can continue to [HOOBS 5](#) setup below.

1. If you do not already have a HOOBS 4 server, refer to [their installation guide](#) or purchase one of their [Plug and Play Hubs](#) and return here once your server is powered on and running.
2. Navigate to `http://hoobs.local/` in a web browser. If this is the first time loading HOOBS you should see the following screen and can click "Continue In Browser", otherwise skip to Step 4 after logging in:

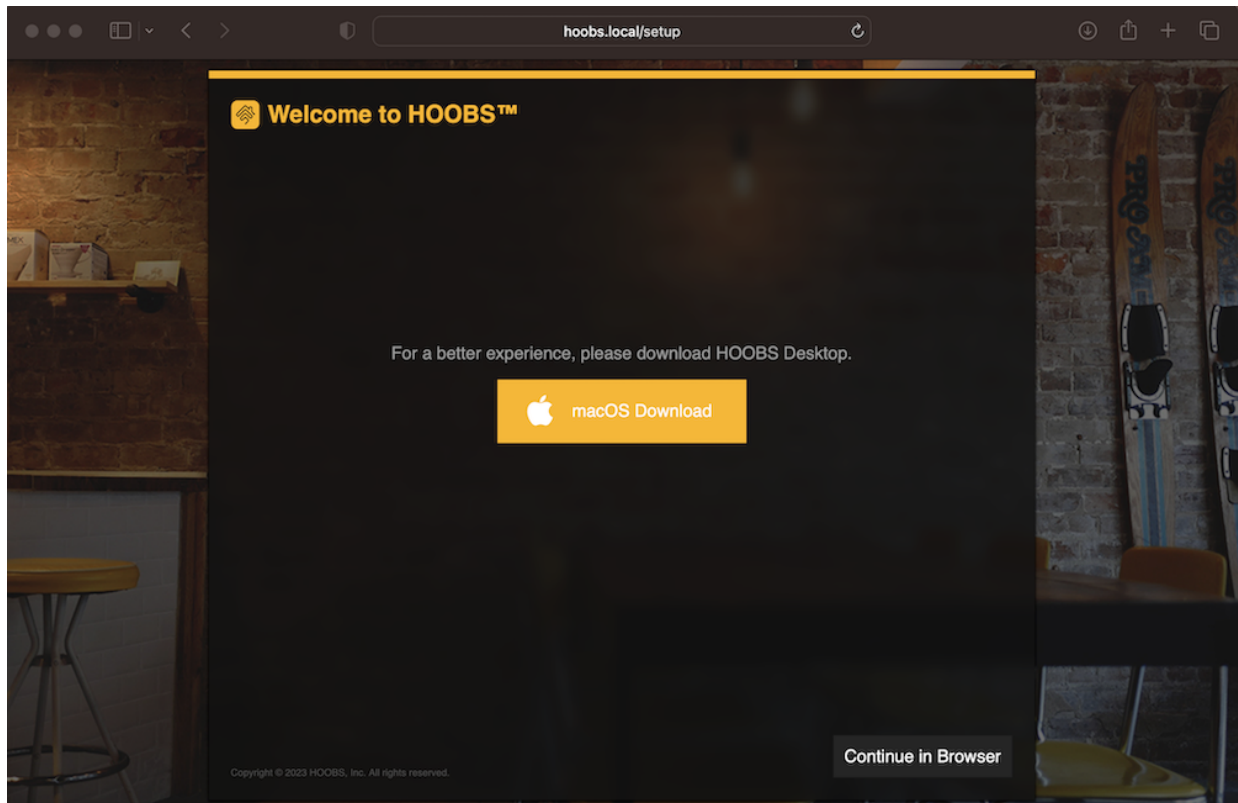


3. Fill in information for an `admin` account, then click "Create Account":


This will be your main user account and not used by the driver.

A screenshot of the HOOBS setup page, showing the 'Welcome to HOOBS™' message. Below the message, it says 'To start you need to setup the administrator account.' There are four input fields: 'Name' (with the text 'Enter your full name.'), 'Username' (with the text 'Define your desired username. Usernames must be at least 3 characters long.'), 'Password' (with the text 'Enter your desired password. Passwords must be at least 5 characters long.'), and 'Reenter Password' (with the text 'Enter your desired password again.'). The 'Name' field contains the text 'Admin'. The 'Username' field contains the text 'admin'. The 'Password' and 'Reenter Password' fields are filled with dots. At the bottom right, there are two buttons: 'Disable Logins' and 'Create Account'. The 'Create Account' button is highlighted in yellow. At the bottom left, there is small text: 'Copyright © 2023 HOOBS, Inc. All rights reserved.'

4. Now we are going to create an account to be used by this driver. Click "Profiles":

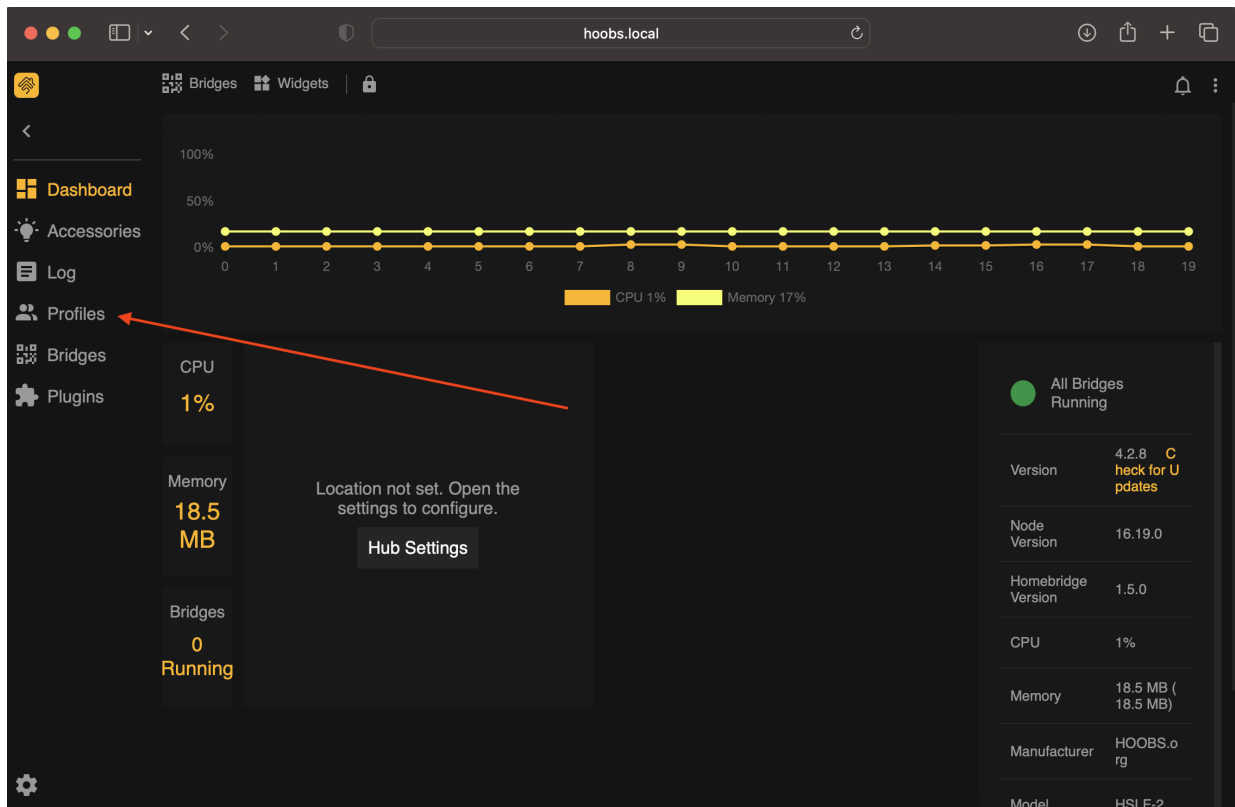


5. Click "Add Profile":

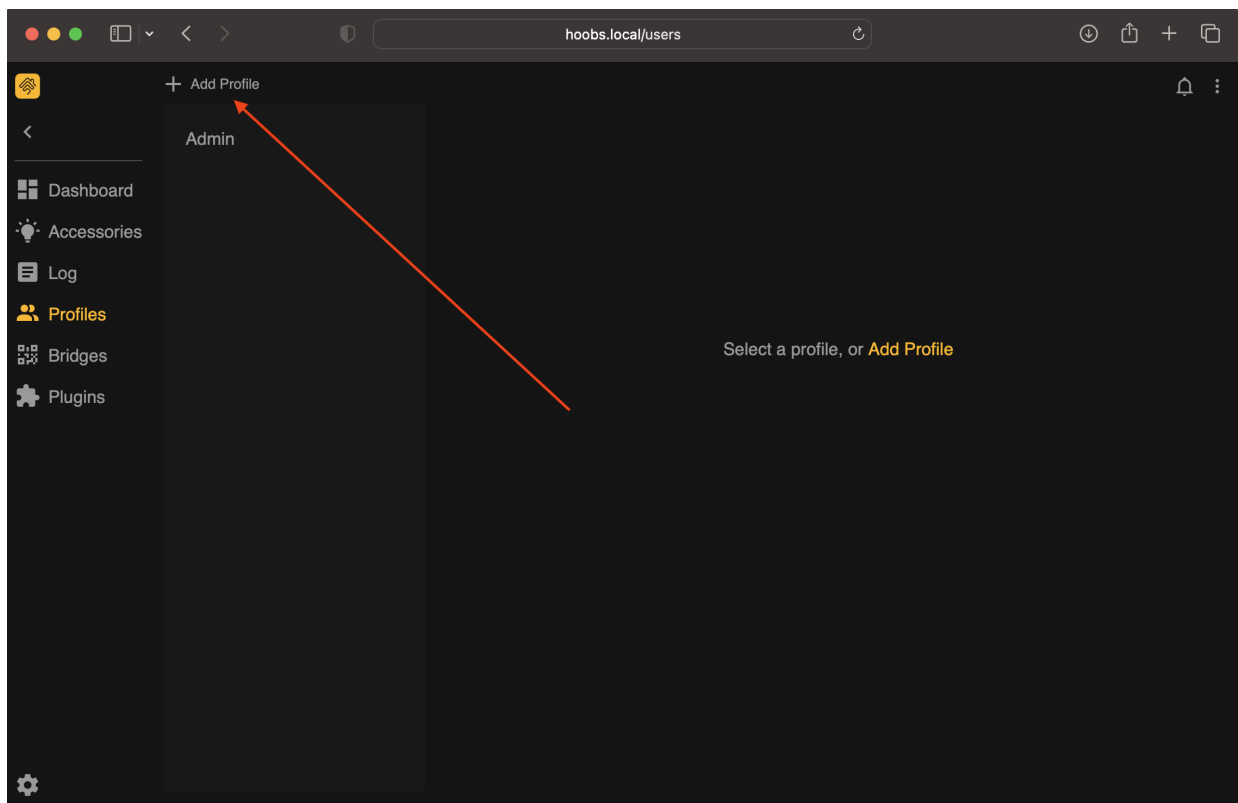


6. Fill in information for a `control4` user, ensuring the below options are selected, then click "Save User":

Remember this password as it will be used later to configure the driver.

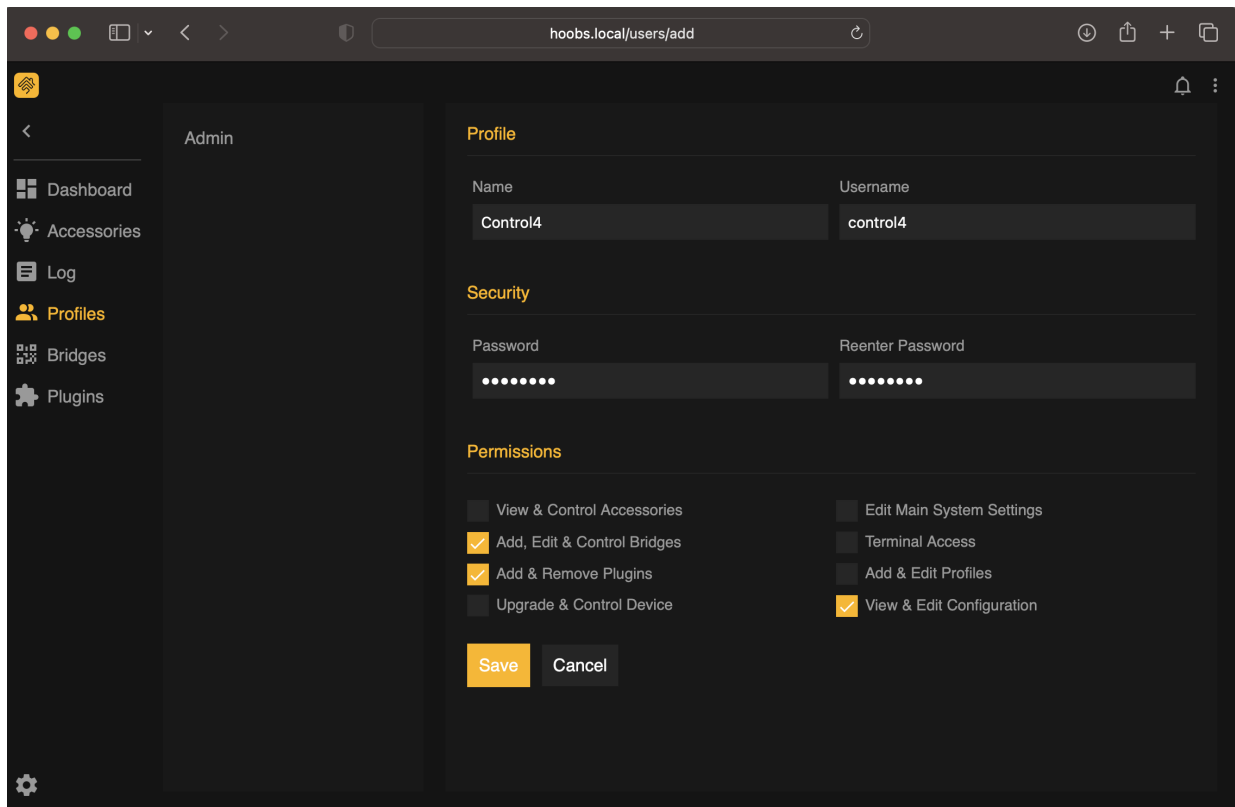


- You should now see the two users you just created. You can close the HOOBS webpage and return to the Composer UI.

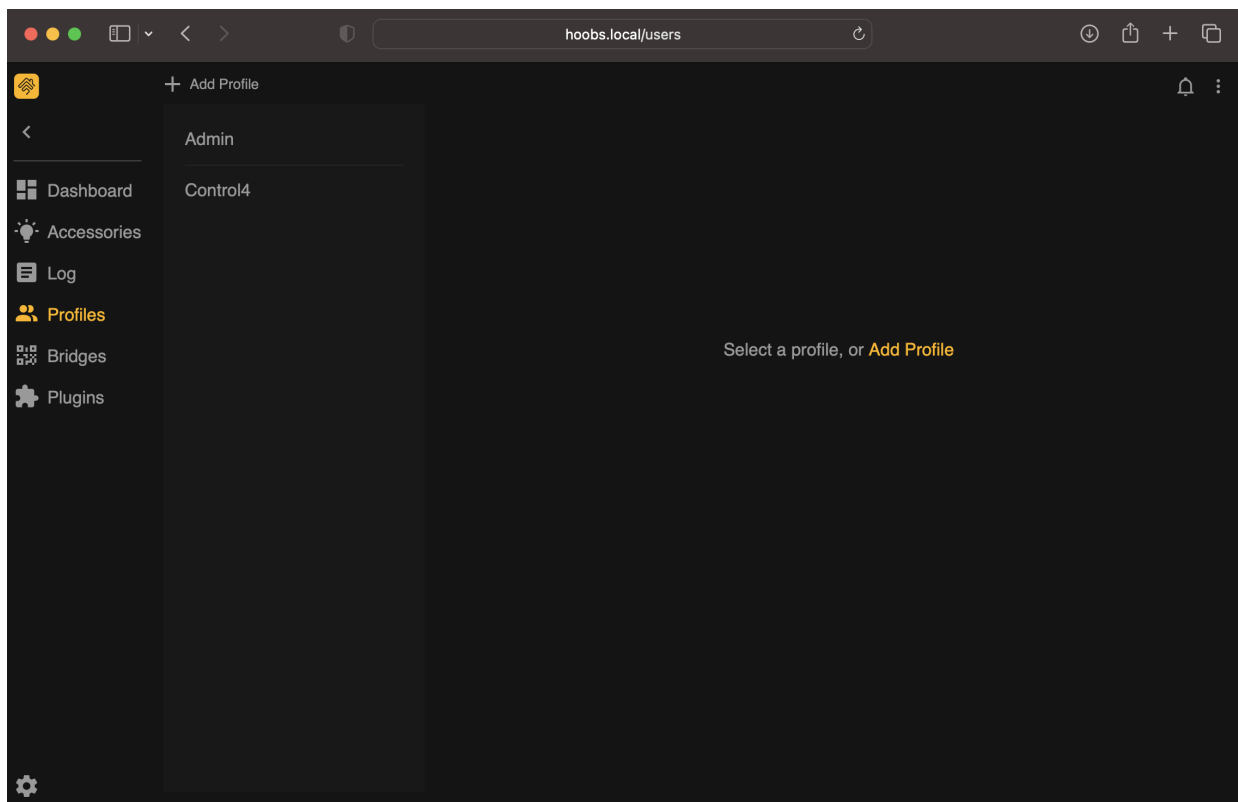


HOOBS 5

You can skip this section and continue to [DriverCentral Cloud Setup](#) if you are using Homebridge or HOOBS 4 as your HomeKit proxy.

1. If you do not already have a HOOBS 5 server, refer to [their installation guide](#) or purchase one of their [Plug and Play Hubs](#) and return here once your server is powered on and running.
2. Navigate to `http://hoobs.local/` in a web browser. If this is the first time loading HOOBS you should see the following screen and can download one of their clients to configure the server, otherwise skip to Step 5 after opening the client and logging in:

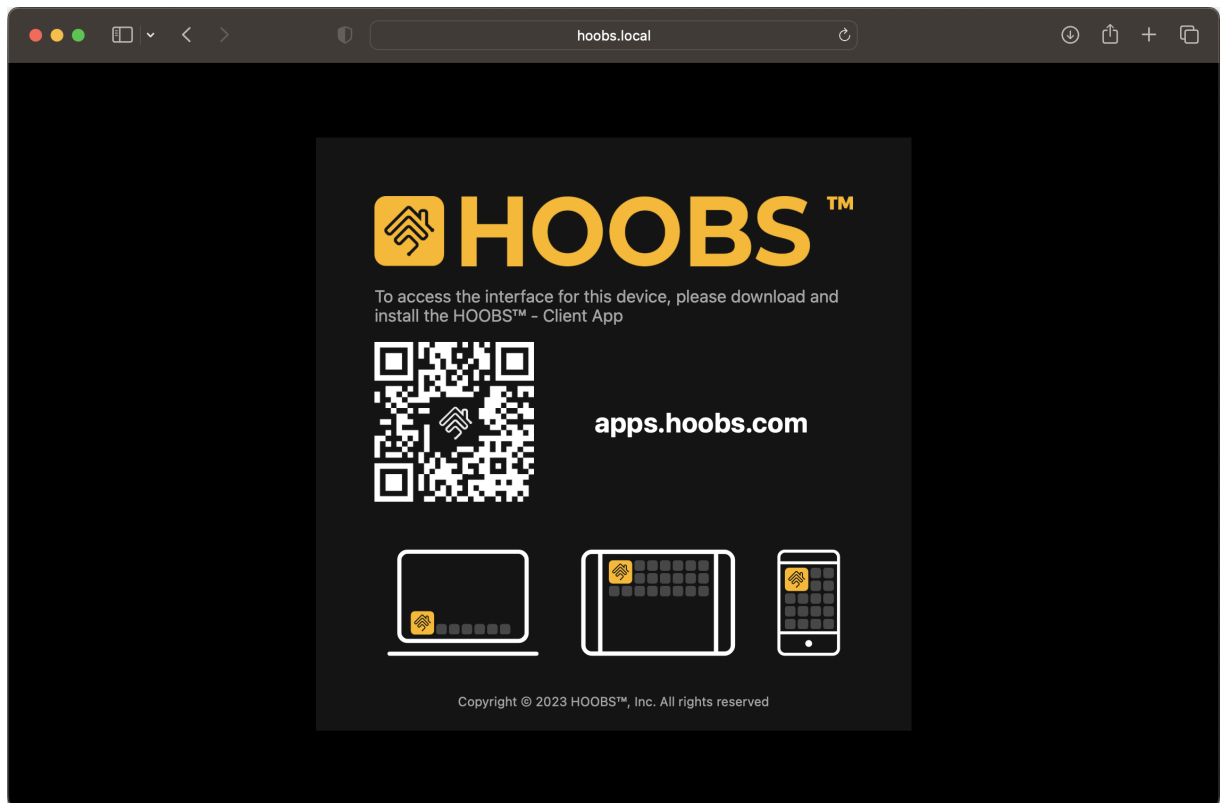


3. After opening the client app, discover your device and click it to continue:

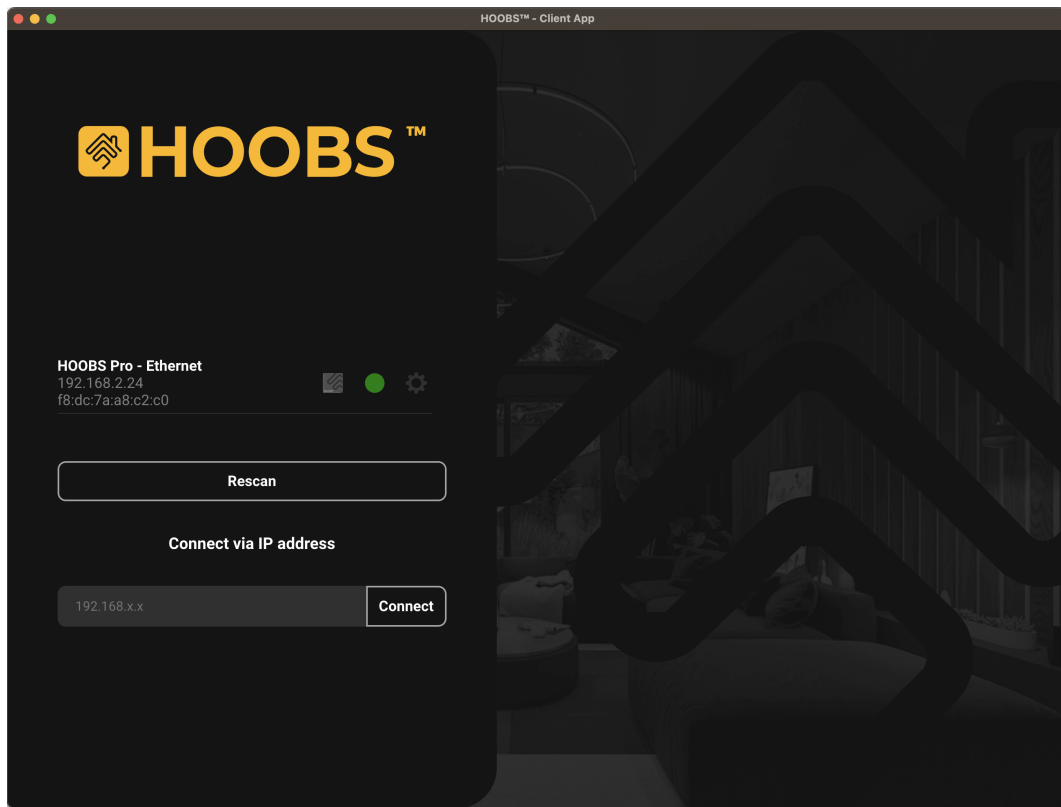


4. Fill in information for an **admin** account, then click "Finish Setup":


This will be your main user account and not used by the driver.

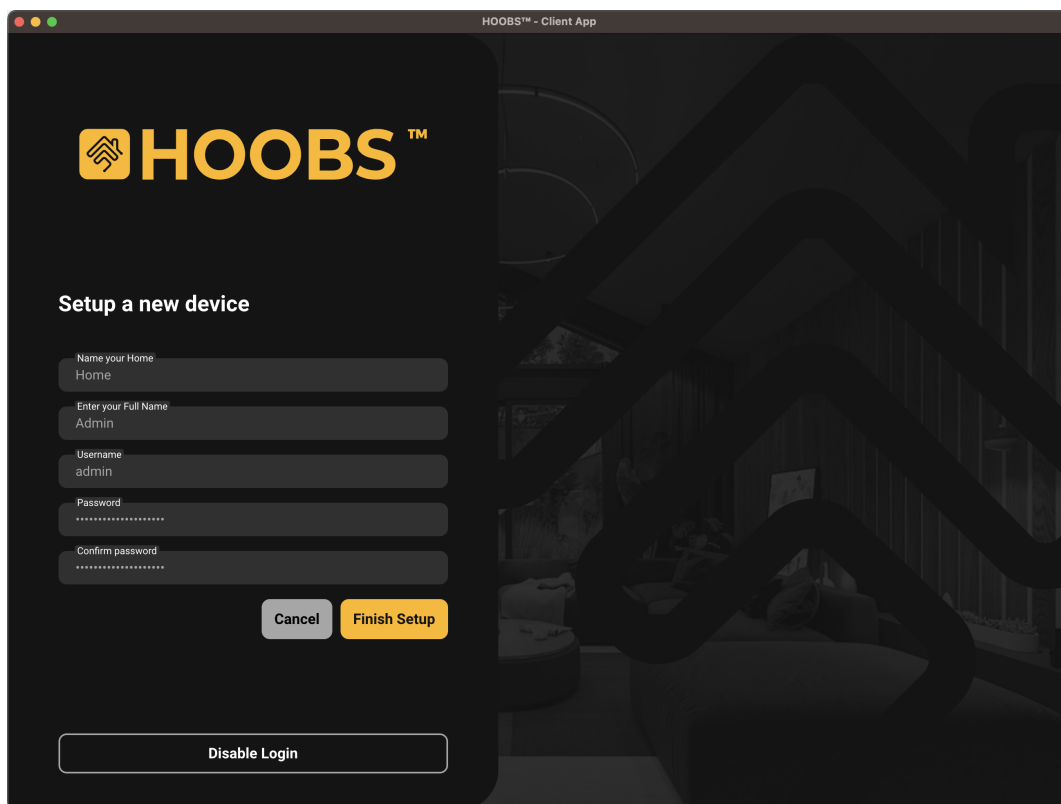

5. Now we are going to create an account to be used by this driver. Click "Profiles":

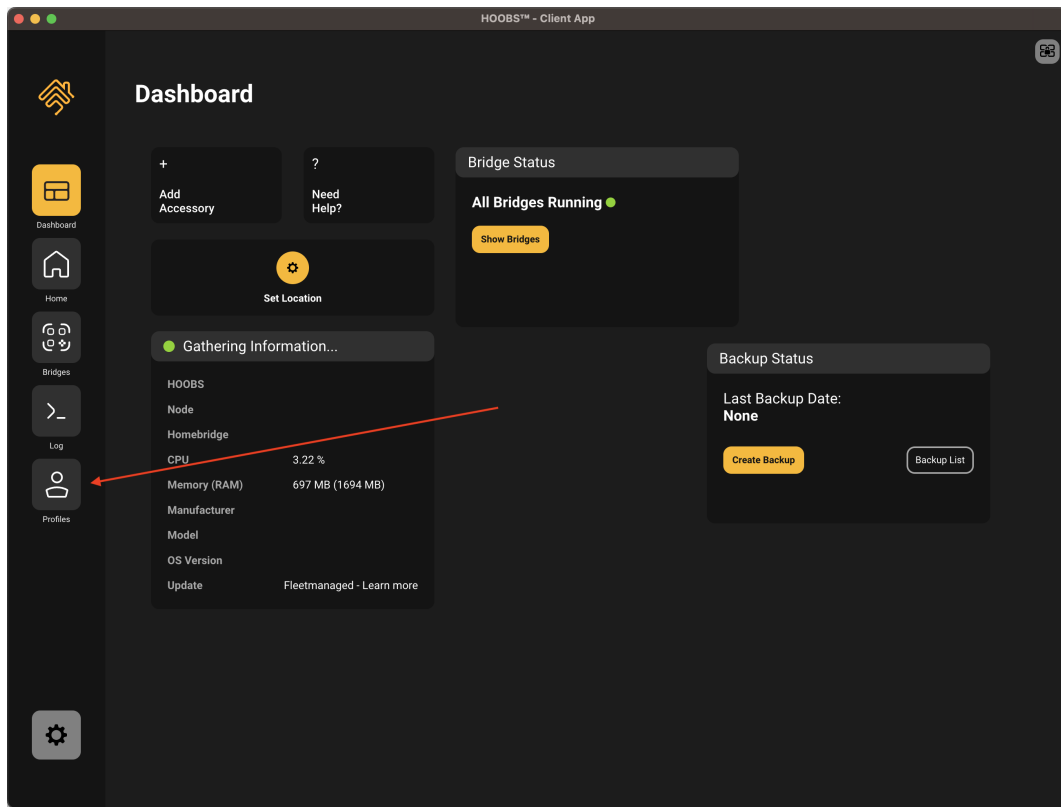


6. Click "Add User":

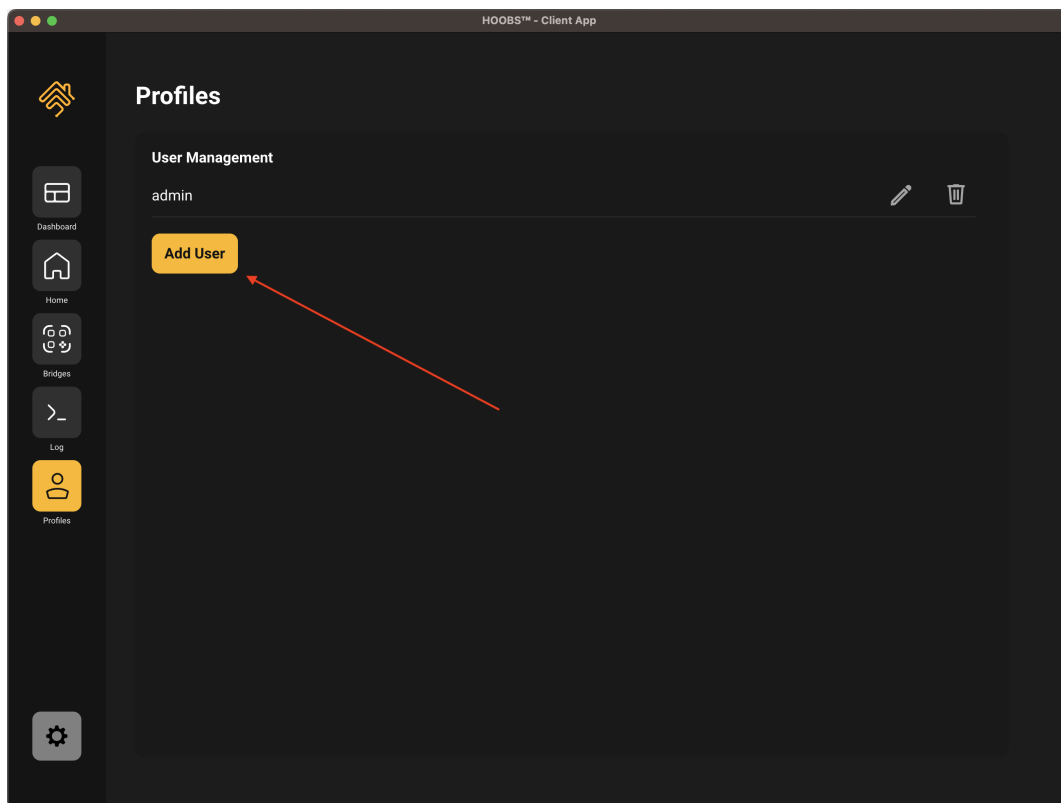


7. Fill in information for a `control4` user, ensuring the below options are selected, then click "Apply":

Remember this password as it will be used later to configure the driver.

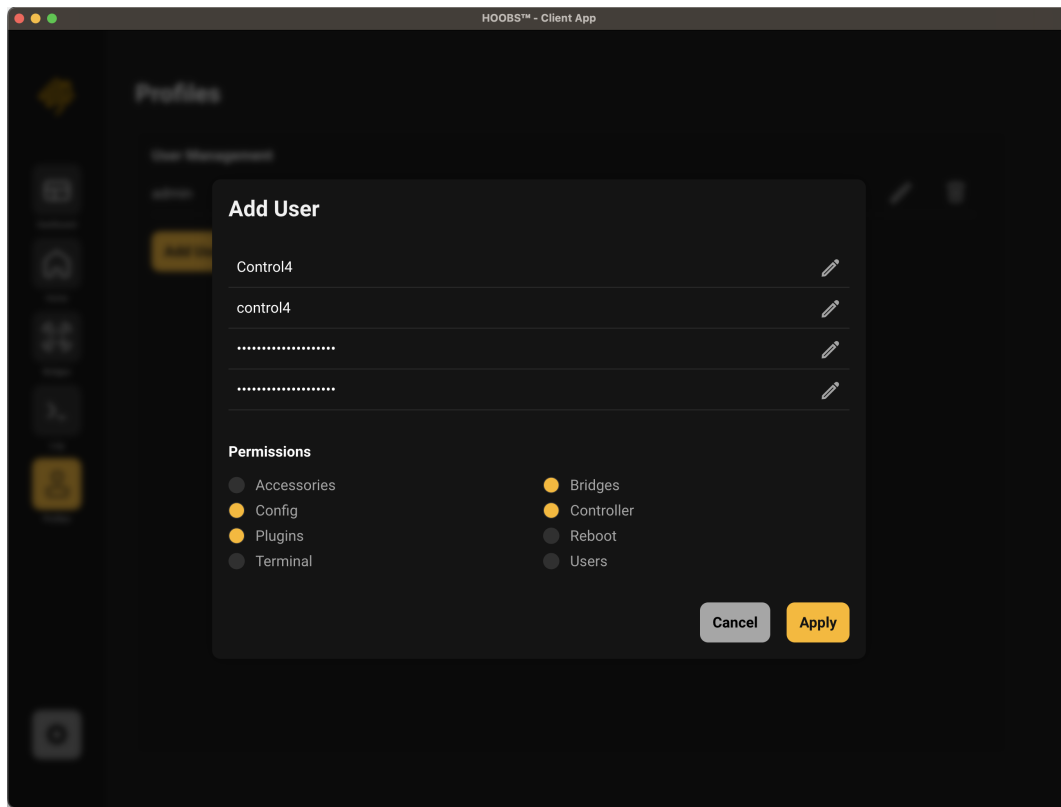

8. You should now see the two users you just created. You can close the HOOBS client and return to the Composer UI.

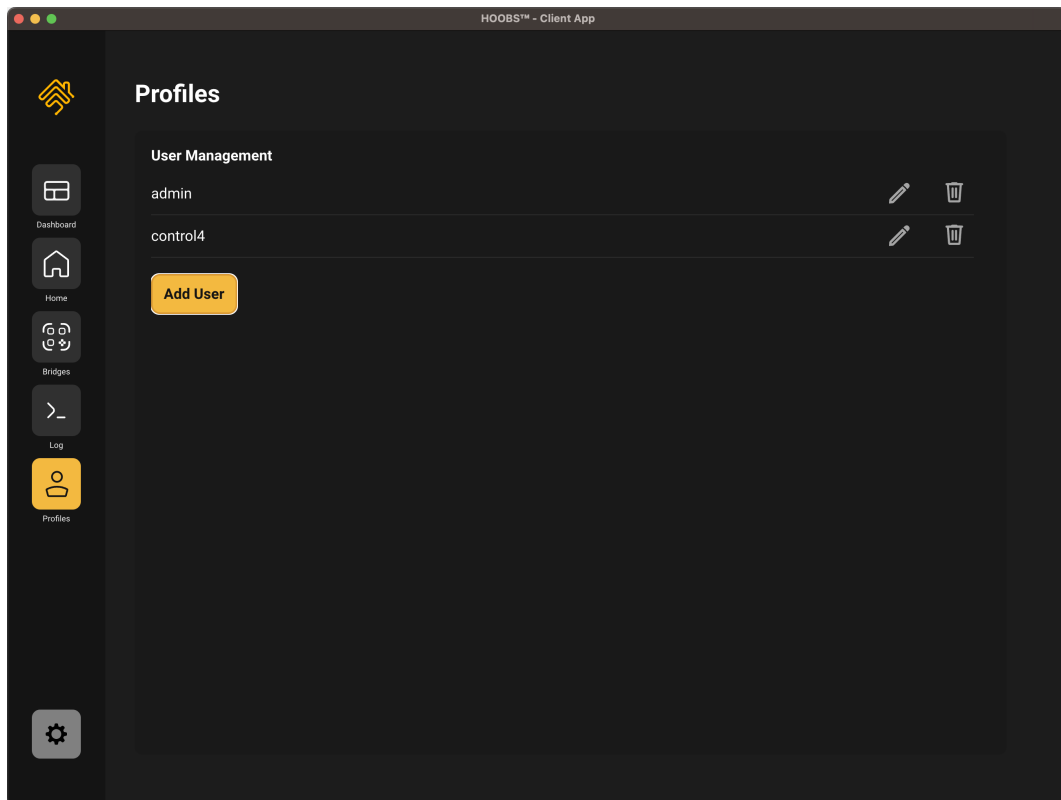


DriverCentral Cloud Setup

If you already have the [DriverCentral Cloud driver](#) installed in your project you can continue to [Driver Installation](#).


This driver relies on the DriverCentral Cloud driver to manage licensing and automatic updates. If you are new to using DriverCentral you can refer to their [Cloud Driver](#) documentation for setting it up.

Driver Installation

1. Install `home_connect.c4z` driver
2. Use the "Search" tab to find the "Home Connect" driver and add it to your project.

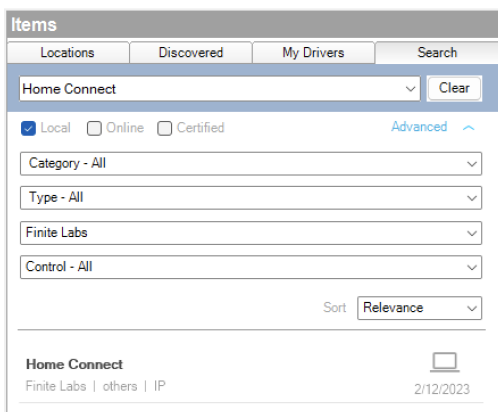

3. Select the driver in the "System Design" tab. You will notice that the `Cloud Status` reflects the licence state. If you have purchased a license it will show `License Activated` , otherwise `Trial Running` and remaining trial duration.
4. You can refresh license status by selecting the "DriverCentral Cloud" driver in the "System Design" tab and perform the "Check Drivers" action.

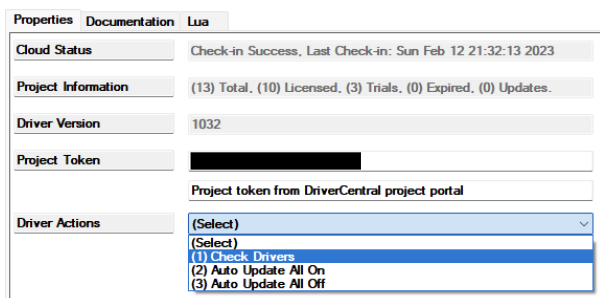

Driver Setup

Driver Tabs

Additional tabs shown while in the [System Design mode](#), next to the "Properties", "Actions", "Documentation", and "Lua" tabs.

Homebridge/HOOBS UI

Displays the Homebridge/HOOBS web UI once the [Server Address](#) and [Server Port](#) are configured. Generally accessing the server web UI is not necessary after initial user setup described in the [Server Setup](#) section, but can be useful to debug issues.

Driver Properties

Cloud Settings

Cloud Status

Displays the DriverCentral cloud license status.

Automatic Updates

Turns on/off the DriverCentral cloud automatic updates.

Driver Settings

Driver Status (read only)

Displays the current status of the driver.

Driver Version (read only)

Displays the current version of the driver.

Setup Code (read only)

Displays the setup code used when adding accessories from this driver to Apple Home.

Cameras Supported (read only)

Displays whether the connected Homebridge/HOOBS server supports camera streaming. This is defined as:

- `ffmpeg` is executable (automatically installed as part of the automated configuration)
- `ffmpeg` supports the `libx264` codec


Log Level [Debug | Info | Warning | Error | Fatal]

Sets the logging level. Default is `Info` .

Log Mode [Off | Print | Log | Print and Log]

Sets the logging mode. Default is `off`.

Server Settings


 Once all the following server setting fields are set, the driver will attempt to connect and configure the server. If this is not desired, you can send the `Disconnect` command in the `Actions` tab. In order to reconnect, you must later send the `Connect` command from the same `Actions` tab.

Server Type [*Homebridge* | *HOOBS4*]

Selects the HomeKit proxy server type. Default is `Homebridge`.

Server Address

Sets the Homebridge/HOOBS server address (e.g. `192.168.1.30 / hoobs.local`).

 If you are using an IP address you should ensure it will not change by assigning a static IP or creating a DHCP reservation.

Server Port

Sets the Homebridge/HOOBS server port. The default port for Homebridge is `8581` and HOOBS is `80`.

Server SSL Mode [*Disabled* | *Enabled* | *Enabled (Strict)*]

Sets the Homebridge/HOOBS server SSL mode. Default is `Disabled`. Choose from the following options:

- `Disabled` - SSL support is disabled.
- `Enabled` - SSL support is enabled, but host verification is *not* enforced.
- `Enabled (Strict)` - SSL support is enabled and host verification is enforced.

Username

Sets the Homebridge/HOOBS server username. This will be `control4` if you followed the [Server Setup](#) guide above.

Password

Sets the Homebridge/HOOBS server password. If you followed the [Server Setup](#) guide above, this will be the password you created in step #7 for Homebridge, or step #6 for HOOBS.

Accessories

The following properties are used to determine which devices from your Control4 project to add to Apple Home. If changes are made to these properties after completing the [Customer Setup](#) they will be synchronized with Apple Home in real-time. Apple Home will typically add new accessories to a "Default Room", so be sure to check there if you cannot find a recently added accessory.

Select Watch/Listen Rooms

Select rooms to add as a TV accessory in Apple Home. An "input" is created for each watch and listen activity available to the room and not hidden by the below configuration properties.

The room can be powered on/off and switched between activities directly from Apple Home and controlled, including volume, using the [Control Center Apple TV Remote](#).

⚠ TVs are added to Homebridge/HOOBS as external accessories, meaning each one will need to be added to Apple Home manually. Adding accessories is covered in the [Customer Setup](#) section below. Conversely, if a room is removed from this list, it will need to be manually removed from Apple Home by editing the accessory and clicking "Remove Accessory".

Configure Watch/Listen Room

Select one of the above rooms to configure. When selected, the below properties will be shown for configuration. This property is hidden when there are no rooms available to configure.

Default Activity

Select an activity to be the default when powering on a room from Apple Home.

Include Watch Activities [*True* | *False*]

Include watch activities as available inputs to hide or show in the Apple Home TV accessory inputs list. Defaults to `True`.

Hide Watch Activity

Select a watch activity to hide from the Apple Home TV accessory inputs list.

Show Watch Activity

Select a watch activity to show in the Apple Home TV accessory inputs list.

Include Listen Activities [*True* | *False*]

Include listen activities as available inputs to hide or show in the Apple Home TV accessory inputs list. Defaults to `False`

Hide Listen Activity


Select a listen activity to hide from the Apple Home TV accessory inputs list.


Show Listen Activity

Select a listen activity to show in the Apple Home TV accessory inputs list.

Select Cameras

Select cameras to add to Apple Home. If `Cameras Supported` reports `No`, this field will be hidden.

 Cameras are added to Homebridge/HOOBS as external accessories, meaning each one will need to be added to Apple Home manually. Adding accessories is covered in the [Customer Setup](#) section below. Conversely, if a camera is removed from this list, it will need to be manually removed from Apple Home by editing the accessory and clicking "Remove Accessory".

 Currently two-way audio is not supported, however while streaming in Apple Home you may see the "Talk" button. This is a known bug in newer versions of iOS that will hopefully be resolved in future updates.

Configure Camera

Select one of the above cameras to configure. When selected, the below properties will be shown for configuration. This property is hidden when there are no cameras available to configure.

 Any changes to these fields will force a Homebridge/HOOBS server restart.

Select Camera Doorbell

Optionally select a doorbell to trigger video doorbell notifications in Apple Home.

Snapshot Source

Select the source of the snapshot. This property is *only* shown when the selected camera supports snapshots. Defaults to `Static`.

- `Static` - The snapshot is fetched from the snapshot URL reported by the camera proxy.
- `Stream` - The snapshot is fetched by grabbing a single frame from the camera stream.

Generally, the default setting of `Static` will work in nearly all cases, but in some cases it may be necessary to override this to `Stream` if you find that snapshots do not show up in Apple Home correctly.

Has Audio


Select whether the camera stream contains audio. This property is *only* shown when an audio capable stream is available.

Most camera drivers do not indicate whether audio is supported and in this case this property will be defaulted to **No**. This property will force the stream to include audio, however if your camera does not support it, the stream will error out while attempting to view in Apple Home. If this happens, you can revert this property to **No**.

Select Lights and Relays

Select lights and relays to add to Apple Home as a **light** or **switch** accessory. If you prefer the accessory to be added as an outlet accessory see [Select Outlets](#) below.

Light brightness and color are controllable if supported by the device. Additionally, if the device supports correlated color temperature, then Adaptive Lighting will be enabled in Apple Home*.

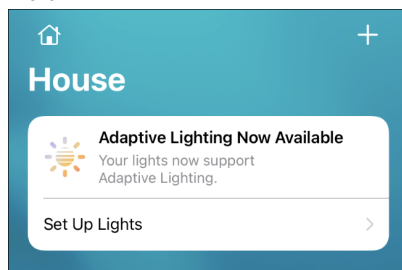

*Requires an Apple Home Hub to be present in the Home.

Select Outlets

Select lights and relays to add to Apple Home as an **outlet** (also known as a receptacle) accessory. If you prefer the accessory to be added as a light or switch accessory see [Select Lights and Relays](#) above.

Select Lighting Scenes


Select [Advanced Lighting](#) scenes to add to Apple Home.

If the list of selectable lighting scenes is empty or missing newly added scenes, set this field to the **Refresh List** value.

Select Fans

Select fans to add to Apple Home.

If you have fans connected to a standard light switch they will not be shown here. Instead, you should add them to the [Select Lights and Relays](#) field. Then, in Apple Home you can change what they are displayed as:

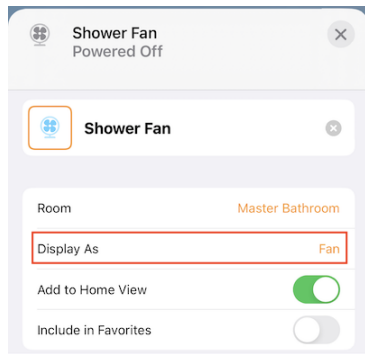

Select Blinds

Select blinds to add to Apple Home.

Select Thermostats


Select thermostats to add to Apple Home.

If the selected thermostat only provides temperature and not control, it will be added as a temperature sensor.

Select Locks

Select locks to add to Apple Home.

Simple relay-based lock devices as well as lock proxy devices are supported. This will typically result in seeing two options for the same lock in the selection window. In this case, select the lock proxy device as it has additional support for faults and low battery notifications.

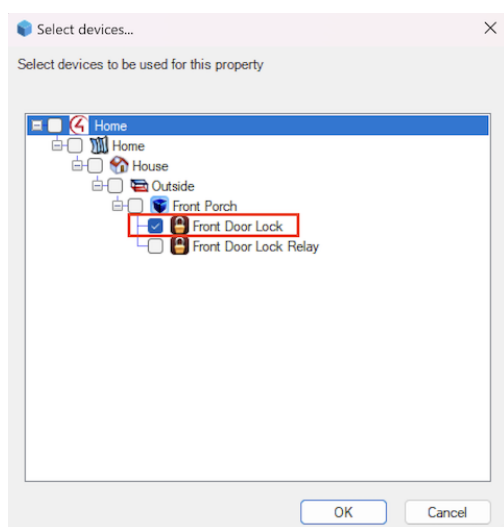

Select Motion Sensors

Select motion sensors to add to Apple Home as a ***motion sensor*** accessory. If you prefer the accessory to be added as an occupancy sensor accessory see [Select Occupancy Sensors](#)

below.

Select Occupancy Sensors

Select motion sensors to add to Apple Home as an **occupancy sensor** accessory. If you prefer the accessory to be added as a motion sensor accessory see [Select Motion Sensors](#) above.


Select Contact Sensors

Select contact sensors to add to Apple Home.

Select Doorbells

Select doorbells to add to Apple Home. This will add an accessory that can be used in automations. For example, "When the doorbell rings, turn on the lights".

Doorbells will show up in Apple Home as a stateless button where you can configure a "Single Press" action. This acts as a one-way trigger from Control4 to Apple Home.

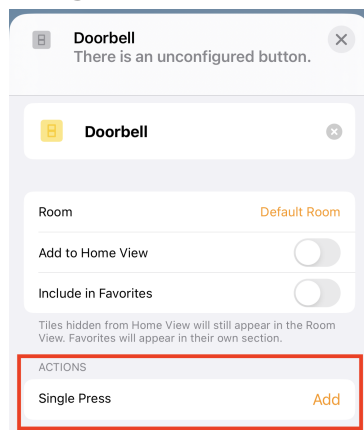

Select Leak Sensors

Select leak/water sensors to add to Apple Home.

Select Smoke Sensors

Select smoke sensors to add to Apple Home.

Select Carbon Monoxide Sensors

Select carbon monoxide sensors to add to Apple Home.

Select Temperature Sensors

Select temperature sensors to add to Apple Home.

If the list of selectable temperature sensors is empty or missing newly added devices, set this field to the [Refresh List](#) value.

This feature only supports devices that expose a `TEMPERATURE_VALUE` connection (e.g. C4-Z2IO) since Control4 does not have a generic temperature proxy.

Select Humidity Sensors

Select humidity sensors to add to Apple Home.

If the list of selectable humidity sensors is empty or missing newly added devices, set this field to the `Refresh List` value.

This feature only supports devices that expose a `HUMIDITY_VALUE` connection (e.g. C4-Z2IO) since Control4 does not have a generic humidity proxy.

Select Garage Doors and Gates

Select garage doors and gates to add to Apple Home.

Only the following garage door drivers are supported:

- `aladdin_connect_door.c4z`
- `ohd_anywhere_door.c4z`
- `garagedoor_relay_control.c4z`
- `gate_relay_control.c4z`
- `garage_agent.c4z`
- `myq_device.c4z`

⚠ If any selected devices show as "Not Responding" in Apple Home, this indicates the selected device does not know its current state. This is usually caused by not having a device capable of sending feedback to Control4 and **not** an issue with this driver. Refer to the device's documentation for proper setup and configuration.

Select Doors

Select doors to add to Apple Home.

Only the following door drivers are supported:

- `door_relay_control.c4z`

⚠ If any selected devices show as "Not Responding" in Apple Home, this indicates the selected device does not know its current state. This is usually caused by not having a device capable of sending feedback to Control4 and **not** an issue with this driver. Refer to the device's documentation for proper setup and configuration.

Select Windows

Select window to add to Apple Home.

Only the following window drivers are supported:


- `window_relay_control.c4z`

⚠ If any selected devices show as "Not Responding" in Apple Home, this indicates the selected device does not know its current state. This is usually caused by not having a device capable of sending feedback to Control4 and **not** an issue with this driver. Refer to the device's documentation for proper setup and configuration.

Select Security Systems

Select security panels to add to Apple Home.

The device selection window will show the partitions as well as the panel, in this case you must select the panel.

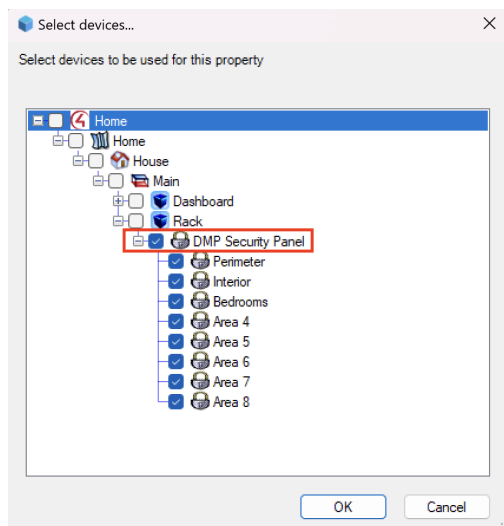

Configure Security System

Select one of the above security systems to configure. When selected, the below properties will be shown for configuration. This property is hidden when there are no security systems available to configure.

Select Primary Partition

Select the primary partition. This partition will be where arm/disarm commands are sent.

Set System Arm/Disarm Password

Set the arm/disarm password. Leave blank if a password is not required.

Select Arm Command for Home

Set the command to use when entering **Home** mode from Apple Home.

Select Arm Command for Away

Set the command to use when entering **Away** mode from Apple Home.


Select Arm Command for Night

Set the command to use when entering **Night** mode from Apple Home. Leave this field unset if the alarm does not have a Night mode.

Select Partition Monitoring Mode [**Arm Type** | **Partition State**]

Select the partition monitoring mode. Default is **Arm Type**.

Typically, drivers will set the "Arm Type" of a commanded partition to the command issued. In this case, you can use the **Arm Type** mode. To confirm this, you can issue the **Home**, **Away**, and **Night** commands (set above) using the Control4 mobile app and confirm the "Arm Type" reported by the panel in the Composer UI equals the command issued:

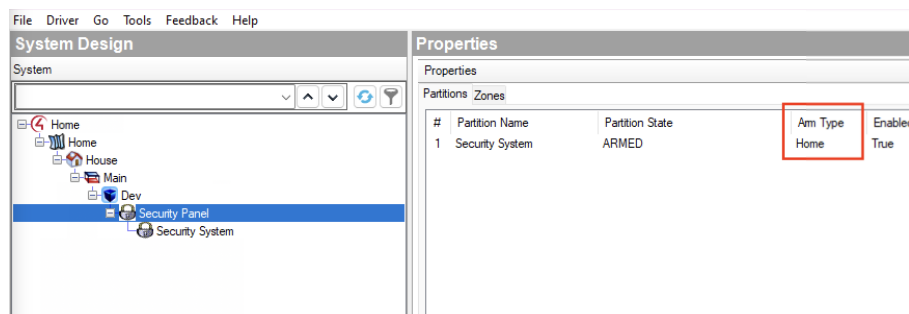

If this is not the case, you can use the **Partition State** mode where you can manually set the partitions to monitor (set below) that will uniquely distinguish between the **Home**, **Away**, and **Night** armed states. For example, if you have an "Interior" and "Perimeter" partition, you would select both partitions for the **Away** state and only the "Perimeter" partition for the **Home** state:

Select Security Systems	DMP Security Panel (392)	Select
Configure Security System	DMP Security Panel (392)	▼
Select Primary Partition	Perimeter (393)	▼
Set System Arm/Disarm Password	****	
Select Arm Command for Home	Arm This Area	▼
Select Arm Command for Away	Arm All Areas	▼
Select Partition Monitoring Mode	Partition State	▼
Select Partitions for Home State	Perimeter (393)	Select
Select Partitions for Away State	Interior (394), Perimeter (393)	Select

The below properties are only shown when using the **Partition State** monitoring mode.

Select Partitions for Home State

Select the partitions armed when the **Home** command is issued.

Select Partitions for Away State

Select the partitions armed when the `Away` command is issued.

Select Partitions for Night State

Select the partitions armed when the `Night` command is issued. Leave this field unset if the alarm does not have a Night mode.

Select Macros

Select macros to add to Apple Home as a switch. By default, the switch will trigger the macro when turned on in Apple Home then revert to the `Off` state after 10 seconds. If configured with a [Toggle Macro](#), it will remain `On` until the toggle macro is executed.

If the list of selectable macros is empty or missing newly added macros, set this field to the `Refresh List` value.

Configure Macro

Select one of the above macros to configure. When selected, the below properties will be shown for configuration. This property is hidden when there are no macros available to configure.

Set Toggle Macro

Set the macro, or none, to run when the macro switch in Apple Home is turned `Off`. If `None` is selected, the switch will revert to the `Off` position after 10 seconds.

Virtual Accessories

Add Virtual Button

Add a virtual stateless button to Apple Home. This accessory can be controlled by a `BUTTON_LINK` connection and/or a programming action. When using a `BUTTON_LINK` for triggering, it will only ever fire a "Single Press" event. The "Double Press" and "Long Press" events can **only** be triggered by Control4 programming.

Connect to an output `BUTTON_LINK` to trigger the "Single Press" button action when the linked button is pressed:

Control & Audio Video Connections				
Home Connect				
Name	Type	Connection	Input/Output	Connected To
Control Inputs				
<input checked="" type="checkbox"/> My Button (1)->Pressed	Control	BUTTON_LINK	Input	

Trigger a single/double/long button press via Control4 programming:

Home Connect Actions

Simulate a single press of button My Button (1)

Commands Conditionals Loops

Device Specific Command

Trigger Button Single Press

Button My Button (1)

Virtual buttons will show up in Apple Home as a stateless button where you can configure "Single Press", "Double Press", and "Long Press" actions. These act as a one-way trigger from Control4 to Apple Home.

My Button
 ×

There is an unconfigured button.

This accessory has not been certified to work with HomeKit so some features may not be available.

My Button
 ×

Room Default Room

Add to Home View ☐

Include in Favorites ☐

Tiles hidden from Home View will still appear in the Room View. Favorites will appear in their own section.

ACTIONS

Single Press Add

Double Press Add

Long Press Add

Remove Virtual Button

Remove a previously [added virtual button](#) from Apple Home. This property is hidden when there are no virtual buttons available to remove.


Add Virtual Switch

Add a virtual switch to Apple Home. This will add a virtual switch accessory controlled by On/Off `BUTTON_LINK` connections and/or programming actions.


Connect to output `BUTTON_LINK` s to the On/Off connections to trigger the Apple Home switch when the linked buttons are pressed:

Control & Audio Video Connections				
Home Connect				
Name	Type	Connection	Input/Output	Connected To
Control Inputs				
My Switch (1)->On	Control	BUTTON_LINK	Input	
My Switch (1)->Off	Control	BUTTON_LINK	Input	


Trigger programming based on switch state changes from Apple Home or Control4:

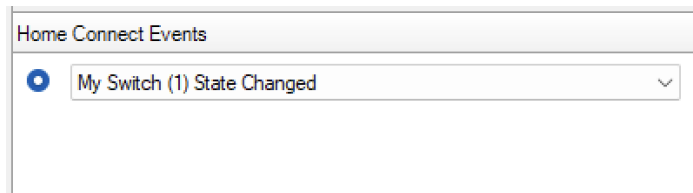

Command switch on/off/toggle via programming:

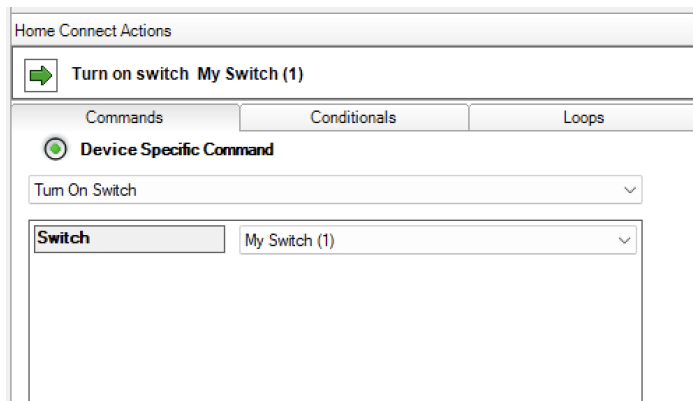

Test switch on/off state via programming:

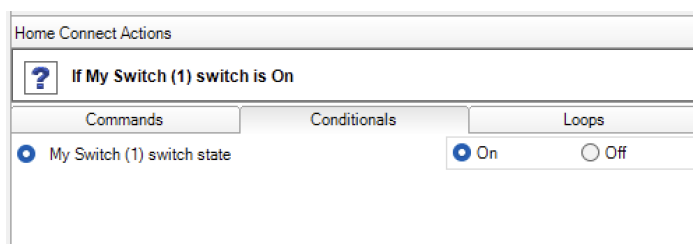

Remove Virtual Switch

Remove a previously [added virtual switch](#) from Apple Home. This property is hidden when there are no virtual switches available to remove.

Add Virtual Power Strip

Add a virtual power strip to Apple Home. This is useful for organizing one or more loads (e.g. power distribution units) in Apple Home under a single accessory, each with their own power button. The power strip accessory will not be added to Apple Home until at least one [outlet is selected](#).

Remove Virtual Power Strip

Remove a previously [added virtual power strip](#) from Apple Home. This property is hidden when there are no virtual power strips available to remove.

Configure Virtual Power Strip

Select one of the above power strips to configure. When selected, the below properties will be shown for configuration. This property is hidden when there are no virtual power strips available to configure.

Select Virtual Power Strip Outlets

Select lights and relays to add to the virtual power strip accessory. If **only** one outlet is selected the accessory will be displayed as a standard outlet similar to those added by

[Select Outlets](#) .

Driver Actions

Synchronize

Synchronize the state between the driver and the Homebridge/HOOBS server. This should generally be unnecessary to perform as the driver synchronizes itself on a regular interval, but is exposed here if you wish to trigger the process manually.

Connect

Trigger the driver to connect to the Homebridge/HOOBS server. The driver will automatically attempt to connect when all the [Server Settings](#) are present, unless the driver [Disconnect](#) action was previously performed.


Disconnect

Trigger the driver to disconnect from the Homebridge/HOOBS server. The driver will not attempt to reconnect until the [Connect](#) action is performed.

Restart Server

Manually trigger a Homebridge/HOOBS server restart. The driver will automatically restart the server for any necessary changes, but this action is exposed as it can sometimes resolve intermittent issues.

Reset Home App Pairings

 This will reset all accessories and automations in Apple Home that were added by this driver. Afterward, you must manually remove any bridges and external accessories still added to the Home app and repeat the [Customer Setup](#).

Reset the bridge and external accessory pairings between Apple Home and the Homebridge/HOOBS proxy. If you had previously paired any bridge or accessory exposed by this driver, you must manually remove them from Apple Home as they will now show as "Not Responding". Check the logs for a list of affected bridges and accessories after executing this action. Under normal circumstances this action should not be executed, but can resolve issues during the pairing process.

Driver Events

Server Connected

Fired when the Homebridge/HOOBS server changes from "Disconnected" to "Connected".

Server Disconnected


Fired when the Homebridge/HOOBS server changes from "Connected" to "Disconnected".

Customer Setup


After the driver is connected to the server it will display a **Setup Code** in the properties tab. Once you have this code you can continue with the steps below.

⚠ If the driver is configured with more than 149 accessories it will expose multiple "Control4 Home Connect" bridge accessories that will need to be added using the process below. You can verify the number of bridges and/or accessories by inspecting the **Driver Status** property when connected.

1. Click the **+** icon at the top right, then "Add Accessory":

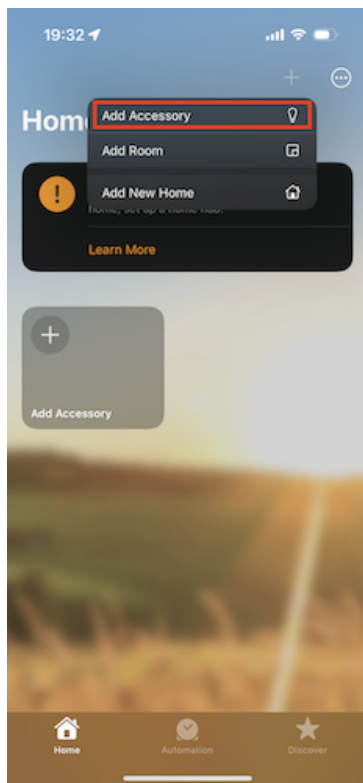


2. Click more options:

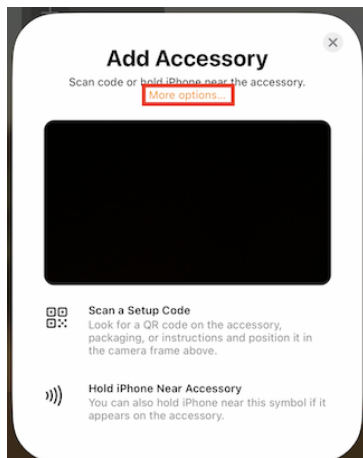


3. Click the bridge named "Control4 Home Connect" (Name may be truncated as shown below):

It is possible other accessories or multiple "Control4 Home Connect" accessories will be shown in the list. Just click on any of the "Control4 Home Connect" bridges.


If you do not see any bridges or accessories **and** have not previously added them, you may need to [reset the Apple Home pairings](#).

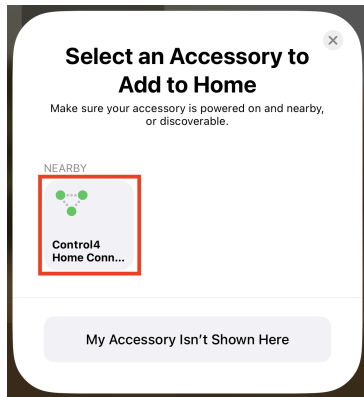


4. Click "Add Anyway":

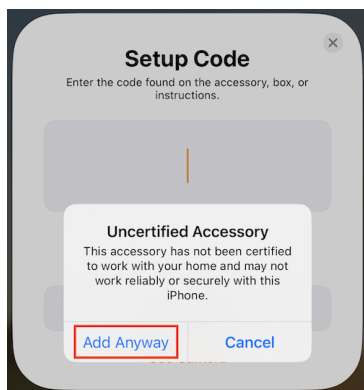


5. Enter the [Setup Code](#), excluding any dashes as they will be automatically added, and click "Continue":

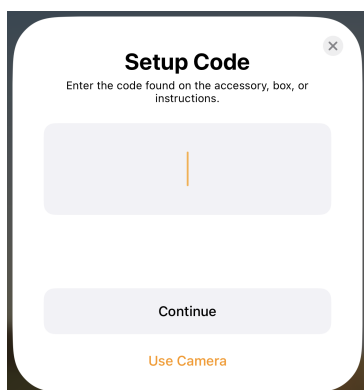


If you experience the following error after clicking "Continue", you may need to [reset the Apple Home pairings](#):

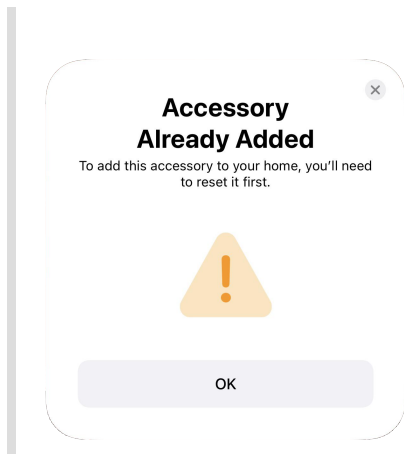



6. Select an appropriate room for the bridge and click "Continue":

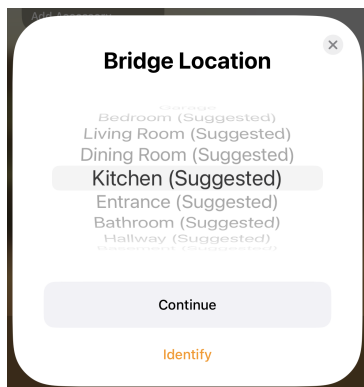


7. Change the default name if desired, then click "Continue":

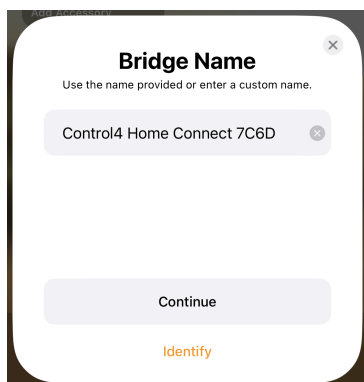

8. If any accessories were configured in the driver's [Accessories](#) properties you will be prompted with a "Continue", otherwise a "Done" button. If "Continue" is displayed you will be prompted to configure each accessory. You will have the option to rename, place it in a room, and any other accessory specific settings. Continue until you are presented with the "Done" button and click it:

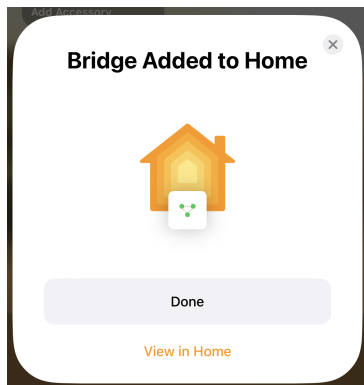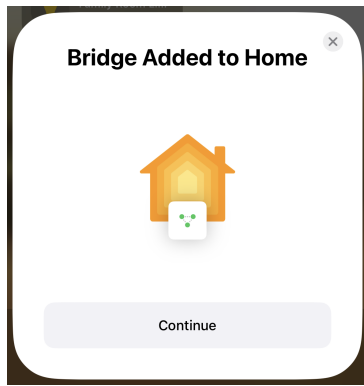

9. If the [Driver Status](#) shows more than 1 bridge, or you noticed multiple "Control4 Home Connect" bridge accessories in step 3, repeat steps 1 - 8 for all remaining bridge accessories.
10. If any devices were selected in the [Select Watch/Listen Rooms](#) or [Select Cameras](#) properties, you will need to repeat steps 1 - 8 for each one. However, instead of selecting a bridge in step 3, you will select a TV/Camera:

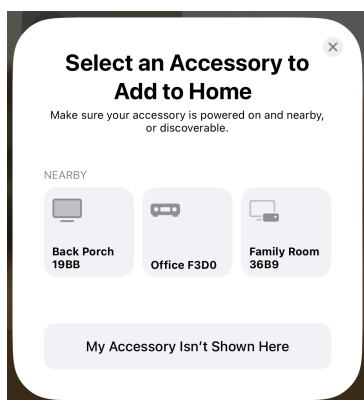

11. That's It! This process only needs to be completed once. Any changes to the driver's [Accessories](#) properties will be updated in Apple Home in real-time.

If you have any issues adding the bridge you can refer to Apple's documentation on [adding accessories](#).

Developer Information



FINITE LABS

Copyright © 2024 Finite Labs LLC

All information contained herein is, and remains the property of Finite Labs LLC and its suppliers, if any. The intellectual and technical concepts contained herein are proprietary to Finite Labs LLC and its suppliers and may be covered by U.S. and Foreign Patents, patents in process, and are protected by trade secret or copyright law. Dissemination of this information or reproduction of this material is strictly forbidden unless prior written permission is obtained from Finite Labs LLC. For latest information please visit <https://drivercentral.io/platforms/control4-drivers/utility/home-connect-for-apple-home>

Support

If you have any questions or issues integrating this driver with Control4 or Apple Home, you can contact us at driver-support@finitelabs.com or call/text us at +1 (949) 371-5805.

Changelog

v20240424 - 2024-04-24

Changed

- Minor performance improvement during project load (e.g. after a controller reboot) to minimize the risk of crashing overloaded controllers.

v20240322 - 2024-03-22

Changed

- Updated DriverCentral cloud client.

v20240319 - 2024-03-19

Fixed

- Fixed logic for `Server Connected` programming conditional.

v20240217 - 2024-02-17

Added

- Added support for Homebridge/HOOBS servers with SSL enabled.
- Added SSL and authentication to the underlying websocket connection responsible for all communication between Apple Home and Control4 for improved security.

v20240130 - 2024-01-30

Fixed

- Fixed handling of the security system arm types that include the `Instant` suffix (e.g. `Stay Instant`). Now if the panel only reports the main mode (e.g. `Stay`) via its variables, the state in Apple Home will be reported correctly instead of `Disarmed` .

v20240114 - 2024-01-14

Added

- Added driver tab for accessing the Homebridge/HOOBS UI from Composer. Note, this only works when Composer is connected to the controller locally on the same network.
- Added support for cameras that only have MJPEG streams.

v20240109 - 2024-01-09

Fixed

- Fixed an issue where the current thermostat temperature would occasionally display `0` .

v20240104 - 2024-01-04

Fixed

- Fixed an issue with detecting the stream url for cameras with dynamic urls that would incorrectly be reported as `No H264 encoded stream found` in the logs.
- Fixed an issue with `Select Doorbells` where it would not deduplicate the selected devices when a DS2 or Chime doorbell was selected.

v20231231 - 2023-12-31

Added

- Added previously removed name configurability in Apple Home to television inputs and power strip outlets.

v20231124 - 2023-11-24

Fixed

- Fixed handling of inverted relays for several different services.
- Fixed conditional logic for the "not equal" case.

Removed

- Removed Watch/Listen source name configurability in Apple Home as changes in Control4 could result in incorrect/stale names. Sources are named based on their name in Control4.

v20231119 - 2023-11-19

Fixed

- Fixed an issue that forced the thermostat `Auto` mode to be enabled, even if disabled by the device.
- Fixed an issue where some dynamic humidity and temperature sensors would not be detected on reboot.

v20231105 - 2023-11-05

Changed

- Changed camera documentation to explain that each selected camera must be manually added/removed in Apple Home.

v20231102 - 2023-11-02

Added

- Added virtual power strip capability to organize one or more loads (e.g. power distribution units) into a single accessory.
- Added outlet support for [Cindev UniFi Power Gateway](#) plugs.
- Added outlet support for [Cindev UniFi PoE Switch Gateway](#) PoE ports.

v20231030 - 2023-10-30

Fixed

- Fixed an issue with the build process that resulted in JSON decoding errors while communicating with Homebridge/HOOBS.

v20231029 - 2023-10-29

Added

- Added initial support for [cameras](#) that enables viewing and doorbell functionality. Two-way audio and HomeKit Secure Video is still in work.
- Added [doorbell](#) support for the Control4 DS2 Door Station.

Fixed

- Fixed an issue where relay controller based garage doors, gates, and windows would show the opposite opening/closing state when controlled from Apple Home.

Changed

- Changed temperature and humidity sensor implementation to only send updates to Apple Home when the value changed.

v20231019 - 2023-10-19

Fixed

- Fixed an issue with the `Door` -> `Garage Door` migration introduced in `v20230921` causing the myQ devices to not be selectable in the `Select Garage Doors and Gates` property.

v20230929 - 2023-09-29

Fixed

- Fixed an issue with the `Gate` integration where it would not be controlled correctly from Apple Home.

v20230922 - 2023-09-22

Fixed

- Fixed an issue with the Door -> Garage Door migration introduced in v20230921 causing the gates to be removed from Apple Home.
- Fixed an issue with the incorrect target temperature being displayed for thermostats.

v20230921 - 2023-09-21

Changed

- Changed gate device support from being implemented as a HomeKit Door accessory to a Garage Door accessory. With the release of iOS 17, you can now display Garage Door accessories as gates in the settings.

v20230920 - 2023-09-20

Fixed

- Fixed an issue where a thermostat in Auto mode may cause Apple Home to show the accessory as Not Responding .

v20230908 - 2023-09-08

Added

- Added support for configuring the "Night" arm mode of a security system. This will show up as an additional option next to the "Home" and "Away" modes in Apple Home app when configured. If modifying an existing system, a [restart of the Homebridge/HOOBS server](#) is necessary in order to refresh the Apple Home accessory.

v20230902 - 2023-09-02

Changed

- Changed the logic that checks the active connections to the Homebridge/HOOBS server to be more performant. This is an additional improvement aimed to reduce latency of interactions between the controller and other devices (e.g. remotes, keypads, etc.).

v20230830 - 2023-08-30

Fixed

- Fixed an issue where relay controller based garage doors, gates, and windows would show the opposite opening/closing state when controlled outside of Apple Home.

v20230828 - 2023-08-28

Added

- Added garage door support for the [myQ](#) driver.

Changed

- Changed the periodic accessory synchronization to only occur if devices were added/removed/changed/renamed or a navigator refresh was performed. This can be an expensive operation for larger projects and can cause interactions with other devices (e.g. remotes, keypads, etc.) to lag while the synchronization process is running.

v20230824 - 2023-08-24

Fixed

- Fixed an issue where integrated devices with device IDs less than 10 would log a warning in HOOBs/Homebridge.

v20230711 - 2023-07-11

Added

- Added temperature and humidity sensor support for devices that expose `TEMPERATURE_VALUE` and `HUMIDITY_VALUE` connections.

Changed

- Changed `Refresh Advanced Lighting Scenes` and `Refresh Macros` from an action to a selectable `Refresh List` item in the respective property for easier discoverability.

v20230702 - 2023-07-02

Fixed

- Fixed out-of-range value errors for light color temperature and thermostat target temperature.

v20230626 - 2023-06-26

Fixed

- Fixed an issue with incorrect thermostat setpoints after changing between modes (e.g. Off, Auto, Cool, Heat).

v20230624 - 2023-06-24

Added

- Added [Reset Home App Pairings](#) action for fixing issues during the pairing process. See documentation for more information.
- Added additional parameter `Trigger Switch Changed Event` to programmable virtual switch command programming. This will allow conditional triggering of the switch changed event for cases when you only want to update the state of a virtual switch.

v20230620 - 2023-06-20

Added

- Added support for [HOOBS 5](#).

v20230531 - 2023-05-31

Fixed

- Fixed an issue with the `Select Macros` where it was not refreshing the list on driver load.

v20230529 - 2023-05-29

Fixed

- Fixed an issue with the `Refresh Advanced Lighting Scenes` action where the property may incorrectly show no scenes to select.

Added

- Added conditional and event support for macro integration.

v20230525 - 2023-05-25

Added

- Added macro integration for triggering from Apple Home.

v20230524 - 2023-05-24

Fixed

- Fixed integration of blinds that do not have discrete level control.

v20230523 - 2023-05-23

Fixed

- Fixed thermostat capability detection. Certain thermostats were unable to be configured properly and resulted in a non-functioning accessory in Apple Home.
- Fixed handling of temperature changes when in Auto mode. Previously the lower set point would occasionally be set at the midpoint between the actual lower and upper set point.

Changed

- All data for thermostats are now pulled from the proxy variables instead of the state.

v20230519 - 2023-05-19

Fixed

- Fixed an issue where turning on a dimmable light to a value other than the preset may be overridden with the preset value.

v20230518 - 2023-05-18

Fixed

- Fixed a locale encoding issue that would cause issues communicating with HOOBS/Homebridge.

v20230510 - 2023-05-10

Added

- Added window controller support.
- Added door controller support.

Fixed

- Reduced delay of lighting scene state changes when the change originates from outside of Apple Home.

Changed

- When an accessory property (e.g. light brightness) change originates from Apple Home, any additional changes to that property are debounced for 10s. This helps to reduce sending sporadic and/or transitioning states to Apple Home. For example, assume you have a light with a 3s ramp time, and you command the light to 100% in Apple Home. Without this change you may see the light brightness adjust back to 0% then ramp up with the light brightness, instead of staying at 100% where you set it.
- Important log messages are always printed, regardless of log level and/or mode.
- Garage and gate controller integration no longer automatically adds connections to the open/close button links as it now sends the open/close command directly to the device.

v20230424 - 2023-04-24

Fixed

- Fixed light capability detection. Occasionally features such as "Light Color" would be present in Apple Home even though the light did not support it.

v20230417 - 2023-04-17

Added

- Added support for additional fireplace relay drivers.

v20230414 - 2023-04-14

Added

- Added gate controller support.

v20230331 - 2023-03-31

Fixed

- Fixed garage door binding process to only bind open/close connections if currently unbound. This addresses an issue where it would cause the garage door driver to temporarily report an `Unknown` state.

v20230324 - 2023-03-24

Added

- Added garage door support for the [Cindev Garage Agent](#) driver.

v20230308 - 2023-03-08

Added

- Added `Refresh Advanced Lighting Scenes` action for manually refreshing scenes list.

v20230306 - 2023-03-06

Added

- Initial release.