

RadioRa Classic Driver


White Paper (12.14.2016)

Triggering lighting scenes (keypad button pushes) in Control4


RadioRa/Control4 implementation is slightly different than other control system integration. Dealers do not simulate button pushes, they call the actual lighting scene directly.

Steps to integrate Lighting Scenes

- Create an Advanced Lighting Scene and name it (example: morning)
- Add one ra light to the scene
- Remove the action and change Tracking to Don't Track

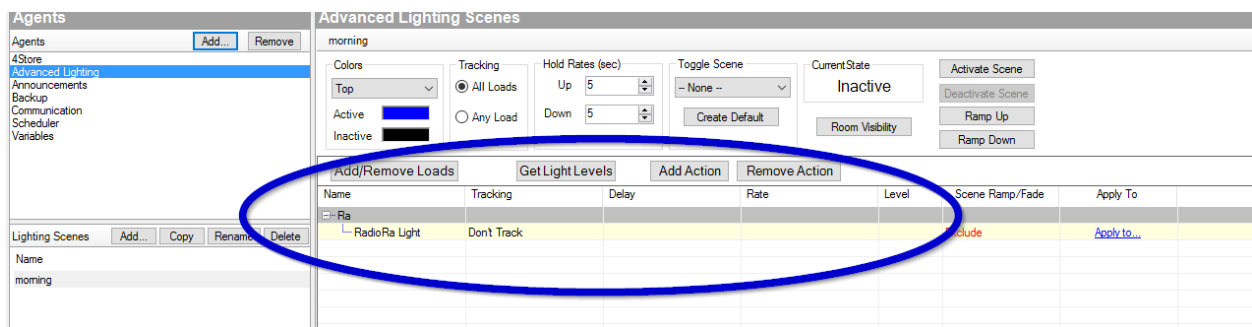

- Click on Programming and select the Advanced Lighting scene you created
- Add Programming Action from main RadioRa driver (Device Specific Command: LIGHTING_SCENE)
 - Choose the correct Scene number (note: 16, 17 are global on/off)
 - Choose Execute Type (ON, OFF, TOGGLE)
 - Choose which system (RadioRa Chronos Systems can trigger scenes from 2 systems. Default is system 1)

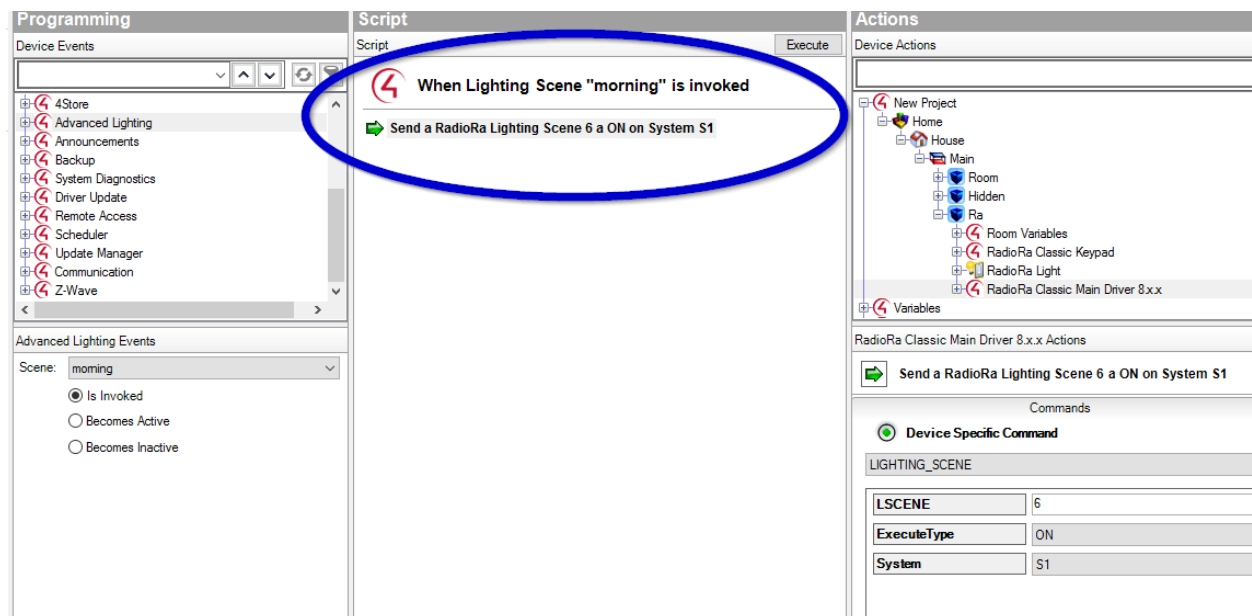

ONE LAST STEP!!!

- The dealer must 'show' the lighting scenes in all rooms that need to use the lighting scene.
- Click on System Design
- Click on the room you want to edit
- Click Navigator
- Choose Lighting Scenes
- Show the lighting scenes
- Refresh Navigators

