


# Vantage InFusion Driver

White Paper (3.17.2017)


Create a lighting scene in Control4 to trigger an existing lighting scene in Vantage

## Steps to integrate Lighting Scenes

- Create an Advanced Lighting Scene and name it (example: morning)
- Add one light to the scene
- Remove the action and change Tracking to Don't Track

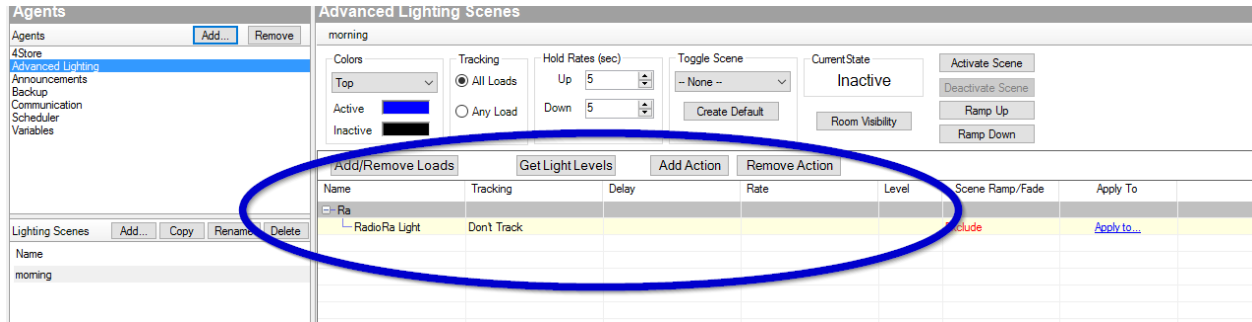

- Click on Programming and select the Advanced Lighting scene you created
- Add Programming Action from main InFusion driver (Device Specific Command: LightScene)

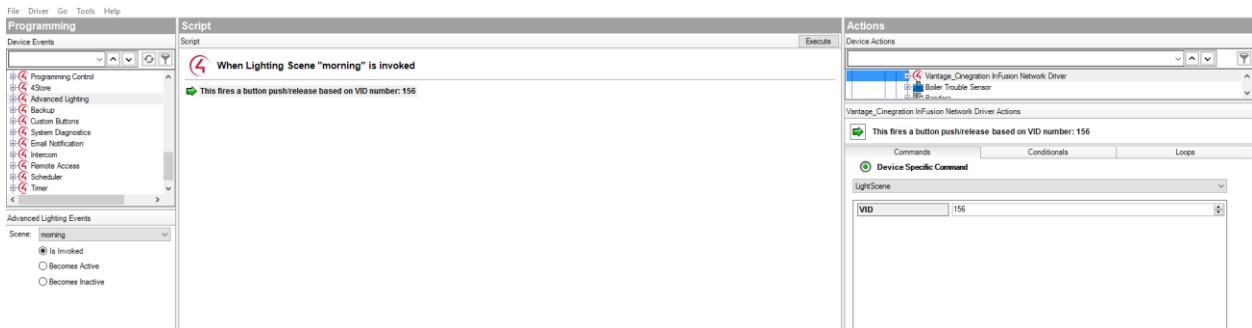

## ONE LAST STEP!!!

- The dealer must 'show' the lighting scenes in all rooms that need to use the lighting scene.
- Click on System Design
- Click on the room you want to edit
- Click Navigator
- Choose Lighting Scenes
- Show the lighting scenes
- Refresh Navigators

### System Design

System

New Project

- Home
  - House
    - Main
      - Room
      - Hidden
      - Ra

### Properties

Audio Video Devices | Navigator | Miscellaneous

Menu Settings

Hide Room in Location Menu     Hide Room's Thermostat

**Experience Menus**

- Comfort
- Lights
- Listen
- Security
- Shades
- Watch

**Submenu Filters**

- Cameras
- Channels
- Lighting Scenes
- Motors/Sensors
- Movies
- Music
- Pools
- Stations

**Device Visibility and Display Order**

Visibility	Device	Location
Visible	morning	

Device Visibility and Display Order

**Visible Devices & Order**

Device	Location
morning	

**Hidden Devices**

Device	Location
--------	----------

Move Up  
Move Down  
Hide >>  
<< Show

OK    Cancel